



1. CONFIGURATION & DIMENSIONS :

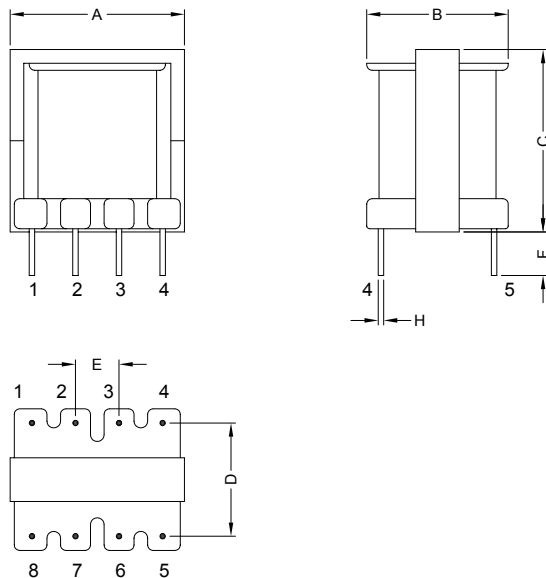

Unit:m/m

A	B	C	D	E	F	H
11.30 Max.	11.30 Max.	12.30 Max.	8.00±0.30	2.50±0.30	2.80 Min.	Ø0.50 Ref.

2. SCHEMATIC :

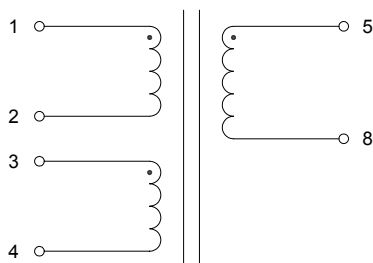

3. SCHEMATIC :

- Bobbin : Phenolic
- Core : EE10.2
- Wire : Polyurethane (1UEW+NY)
- Tape : Polyester Film
- Epoxy : 9001A/B



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

18.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

4. GENERAL SPECIFICATION :

- a) Operating Temperature Range : -25°C to +105°C
- b) Insulation Class : B (130°C)

5. ELECTRICAL CHARACTERISTICS :

Part No.	Inductance (L)	Conditions	Test Frequency	DCR @ 20°C
SEEB0VTF-50728	L : (1-2) = 376uH ~ 460uH	-	100KHz 0.25V	(1-2) = 0.75Ω Max.
	L : (1-2) = 338uH Min.	-	100KHz 0.25V	(3-4) = 2.25Ω Max.
				(5-8) = 2.25Ω Max.



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

18.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD