




1. CONFIGURATION & DIMENSIONS :

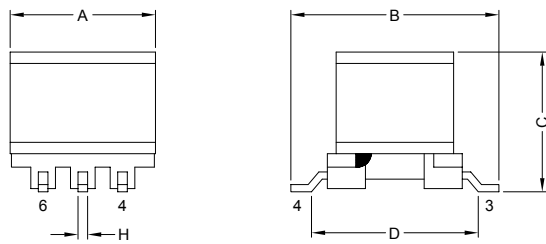

Unit:m/m

A	B	C	D	E	H
10.82 Max.	13.46 Max.	8.71 Max.	10.62±0.15	2.50±0.20	0.71x0.30 Ref.

2. SCHEMATIC :

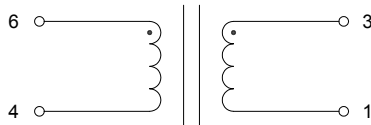

3. SCHEMATIC :

- a) Bobbin : Phenolic
- b) Core : EP7
- c) Wire : Polyurethane DD (2UEW)
- d) Tape : Polyester Film
- e) Varnish : AV119



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

25.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

4. GENERAL SPECIFICATION :

- a) Operating Temperature Range : -25°C to +105°C
- b) Insulation Class : B (130°C)

5. ELECTRICAL CHARACTERISTICS :

Part No.	Inductance (L)	Conditions	Test Frequency	DCR @ 25°C
SEPA7HSF-50370	L : (6-4) = 26.0uH±5%	-	100KHz 1V	(6-1) = 0.09Ω Max.
	L : (6-4) = 22.0uH Min.	-	100KHz 1V	(3-1) = 0.05Ω Max.



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

25.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD