


1. Part No. Expression:

**Z 2 K 3 0 0 - R G - □□**  
 (a)(b) (c) (d) (e) (f) (g)

- (a) Series Code
- (b) Dimension Code
- (c) Material Code
- (d) Impedance Code
- (e) R: Reel
- (f) Current Code: F=600mA
- (g) 10: Standard  
11-99: Internal Controlled Code


2. Configuration & Dimensions:

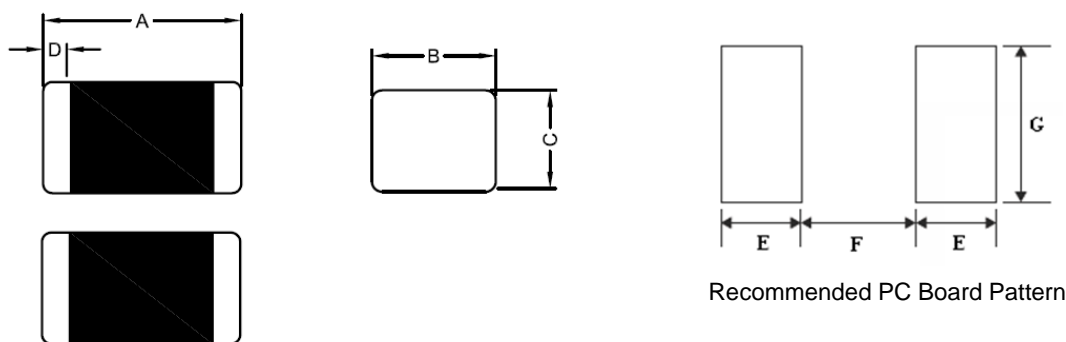


Unit : mm

A	B	C	D	E	F	G
1.60 ± 0.15	0.80 ± 0.15	0.80 ± 0.15	0.30 ± 0.20	0.80 Ref.	0.85 Ref.	0.95 Ref.

3. Schematic:



4. Material List:

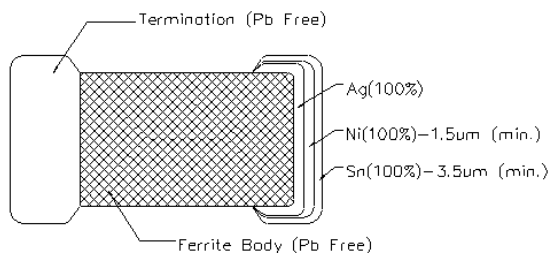

NOTE: Specifications subject to change without notice. Please check our website for latest information.

**5. General Specification:**

- (a) Operating Temp. : -55°C to +125°C
- (b) Storage Temp. : -55°C to +125°C
- (c) Temperature Rise: 20°C Max. at Rated Current <1A
- (d) Storage Condition (Component in its packaging)
  - i) Temperature: Less than 40%
  - ii) Humidity : 60% RH

**6. Electrical Characteristics:**


Part Number	Impedance (Ω)	Test Frequency (MHz)	DCR (Ω) Max.	Rated Current (mA) Max.
Z2K300-RG-10	30±25%	100	0.20	700
Z2K600-RG-10	60±25%	100	0.20	700
Z2K121-RF-10	120±25%	100	0.25	600
Z2K151-RF-10	150±25%	100	0.25	600
Z2K221-RF-10	220±25%	100	0.30	550
Z2K301-RE-10	300±25%	100	0.35	500
Z2K471-RD-10	470±25%	100	0.45	350
Z2K601-RD-10	600±25%	100	0.50	350
Z2K102-RB-10	1000±25%	100	0.70	200
Z2H152-RB-10	1500±25%	100	1.00	200
Z2H202-RB-10	2000±25%	100	1.20	150
Z2C100-RG-10	10±25%	100	0.20	700
Z2C300-RF-10	30±25%	100	0.25	600
Z2C600-RF-10	60±25%	100	0.30	600
Z2C121-RC-10	120±25%	100	0.40	300
Z2C151-RC-10	150±25%	100	0.40	300
Z2C221-RC-10	220±25%	100	0.60	250
Z2C301-RB-10	300±25%	100	0.80	200
Z2C471-RB-10	470±25%	100	0.85	200
Z2C601-RB-10	600±25%	100	1.20	150

NOTE: Specifications subject to change without notice. Please check our website for latest information.




7. Characteristics Curve:


Z2K300-RG-10

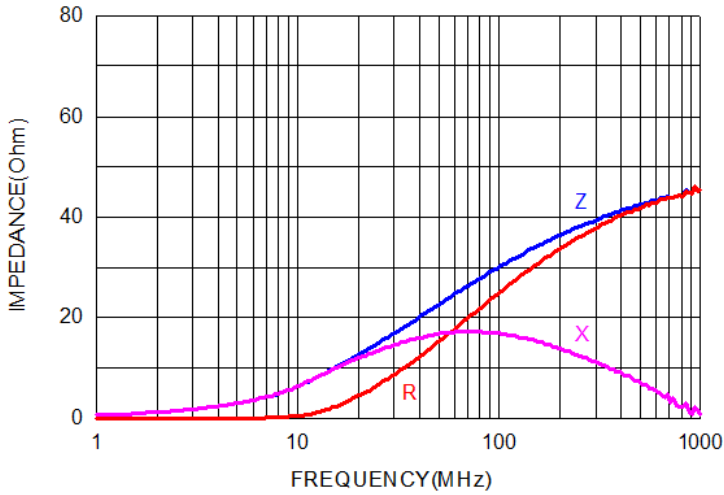


Z2K600-RG-10

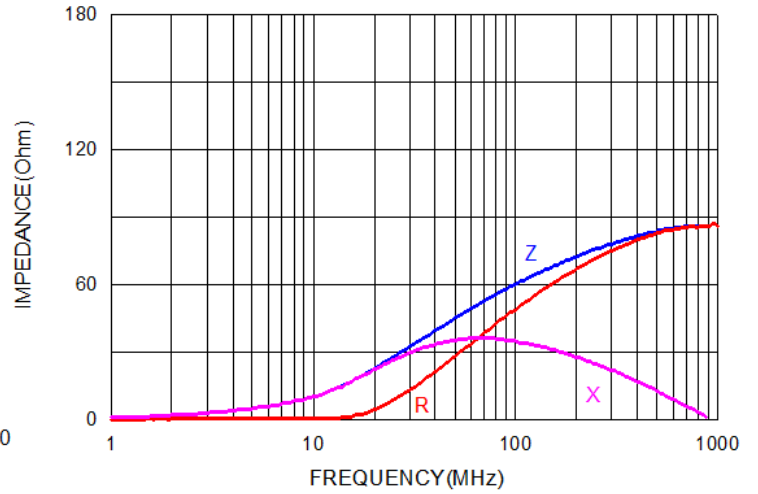


Z2K121-RF-10

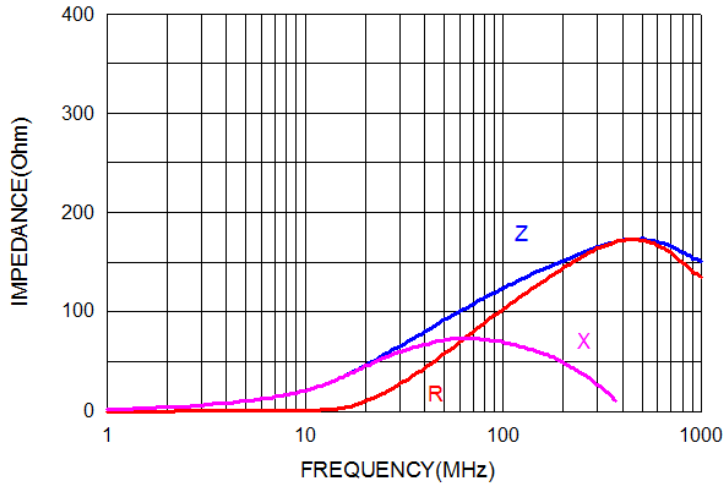


Z2K151-RF-10

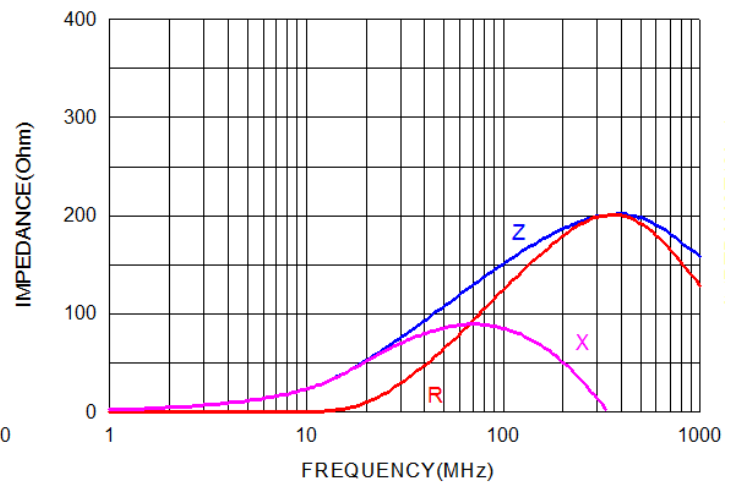

Z2K221-RF-10

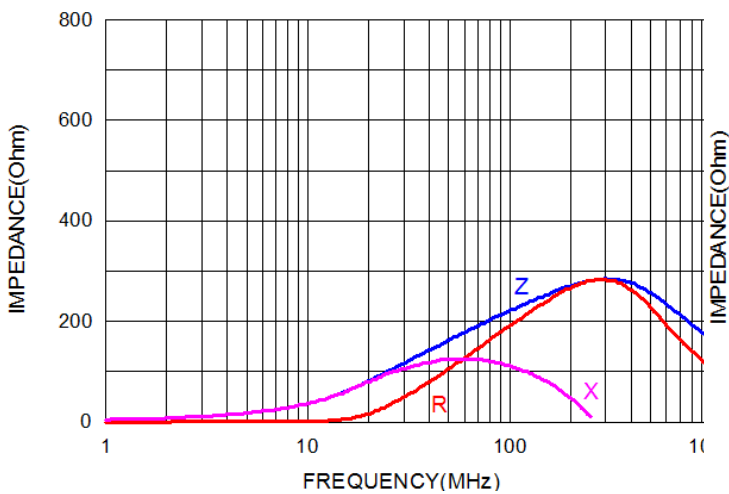


Z2K301-RE-10

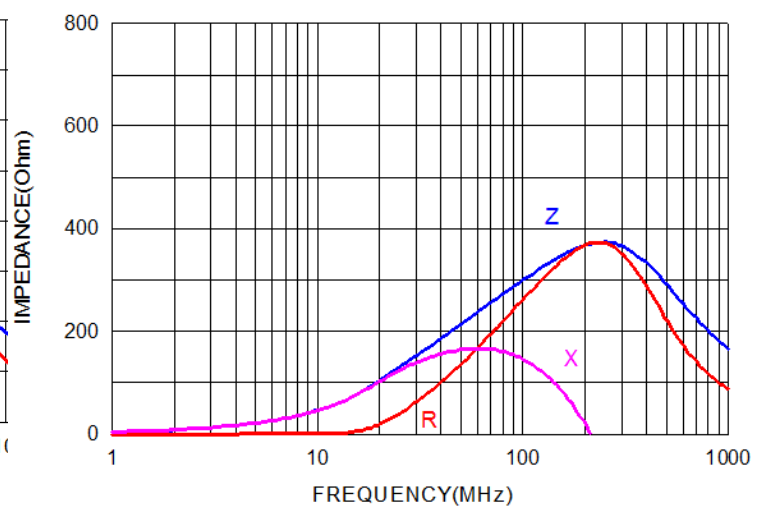


NOTE: Specifications subject to change without notice. Please check our website for latest information.




Z2K471-RD-10

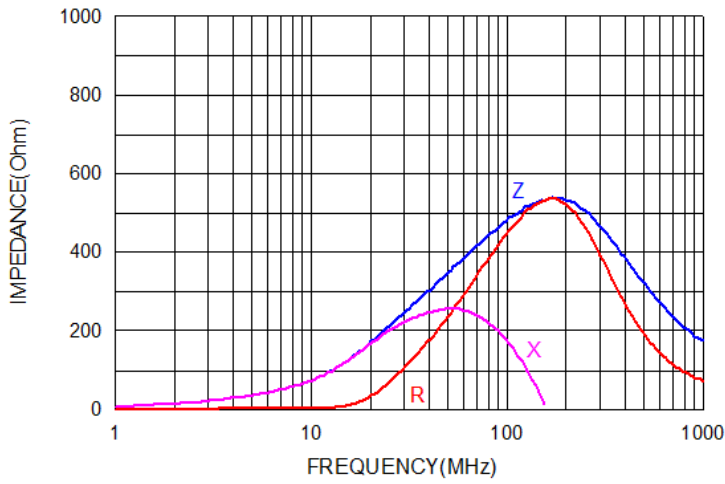


Z2K601-RD-10

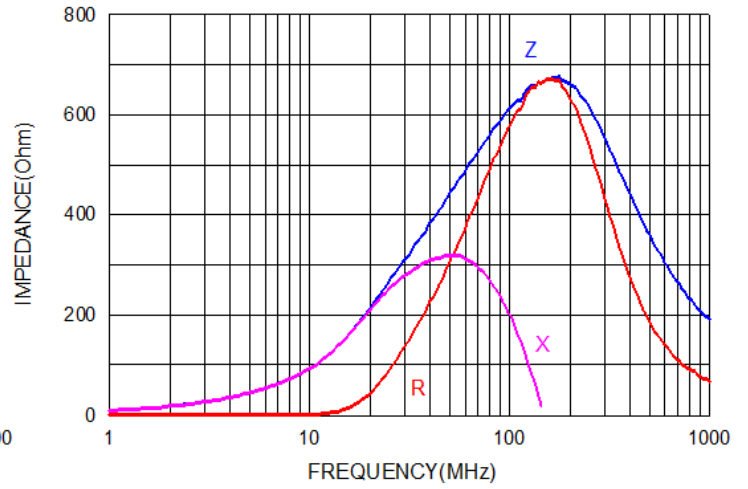


Z2K102-RB-10

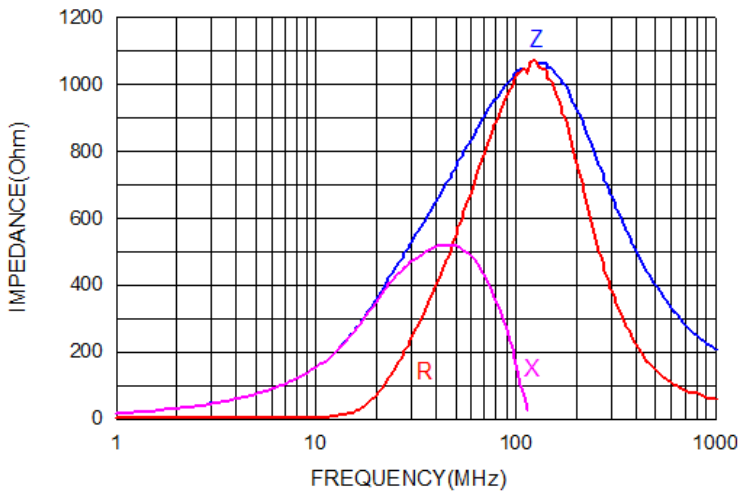


Z2H152-RB-10

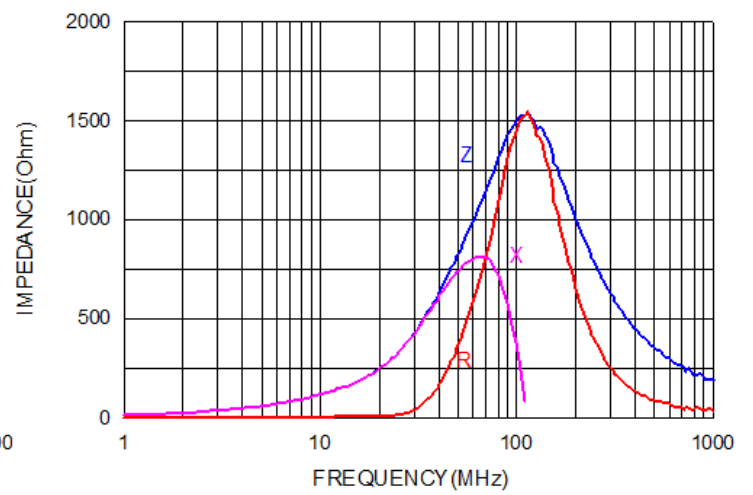

Z2H202-RB-10

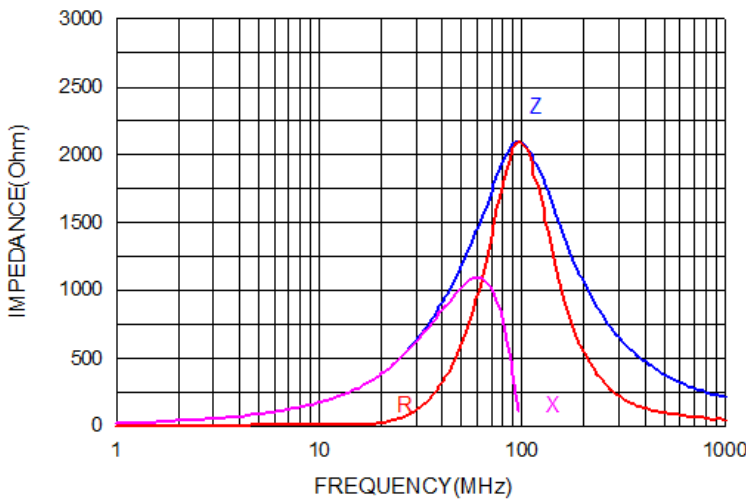


Z2C100-RG-10

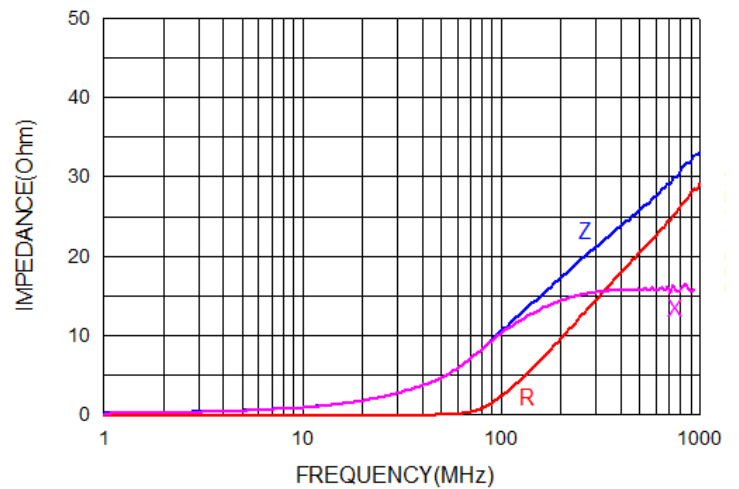


NOTE: Specifications subject to change without notice. Please check our website for latest information.




Z2C300-RF-10

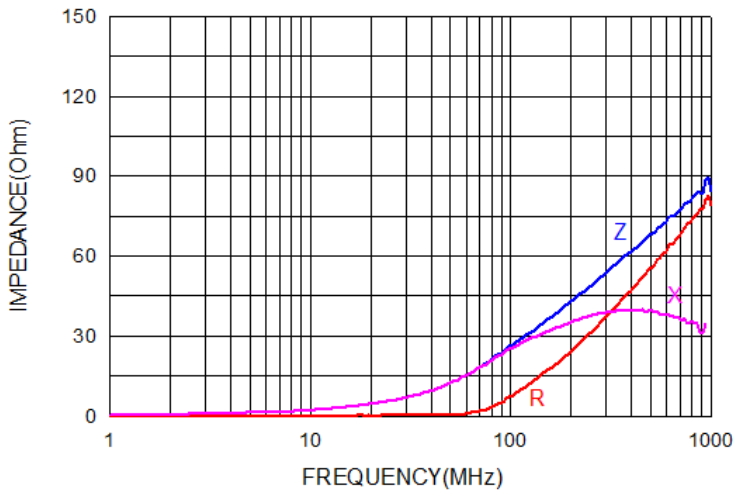


Z2C600-RF-10

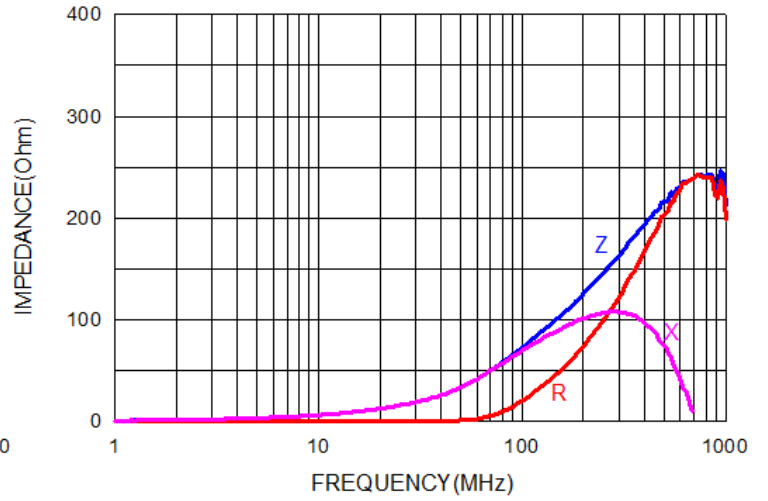


Z2C121-RC-10

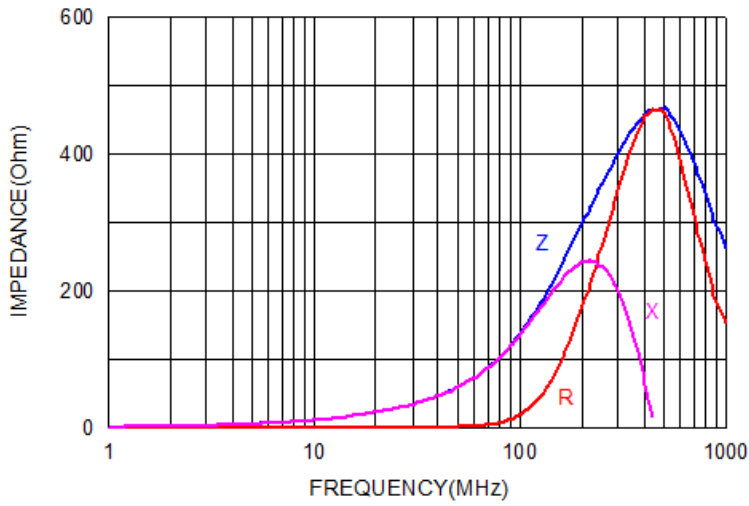


Z2C151-RC-10

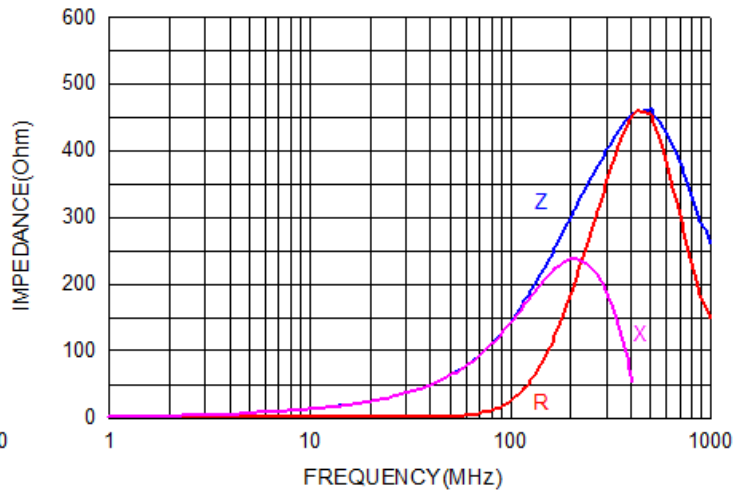

Z2C221-RC-10


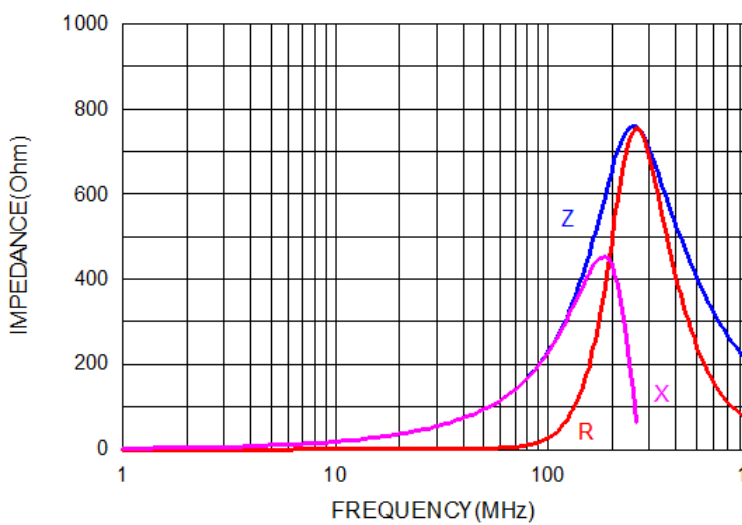


Z2C301-RB-10

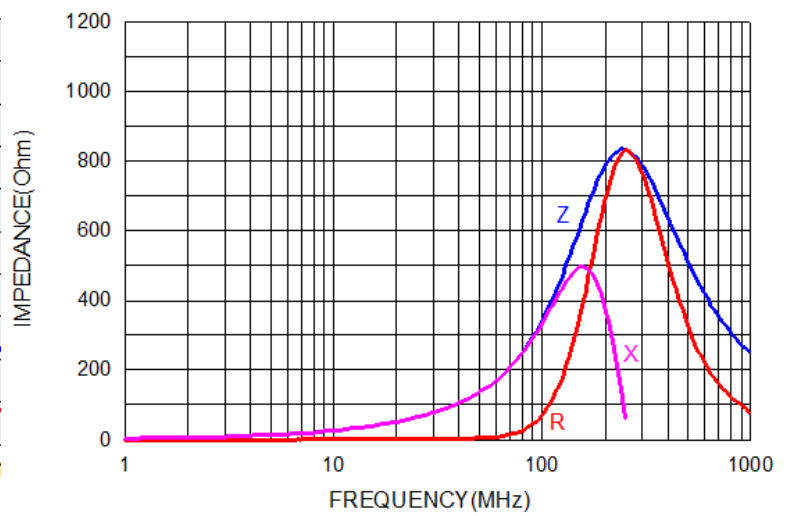

NOTE: Specifications subject to change without notice. Please check our website for latest information.



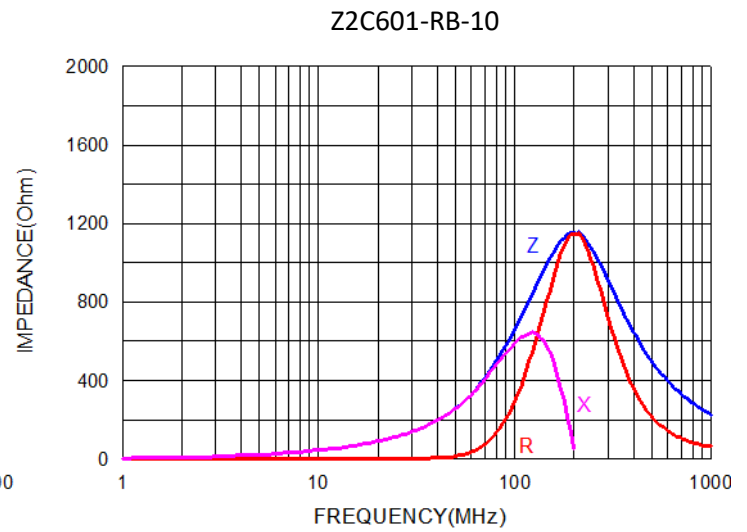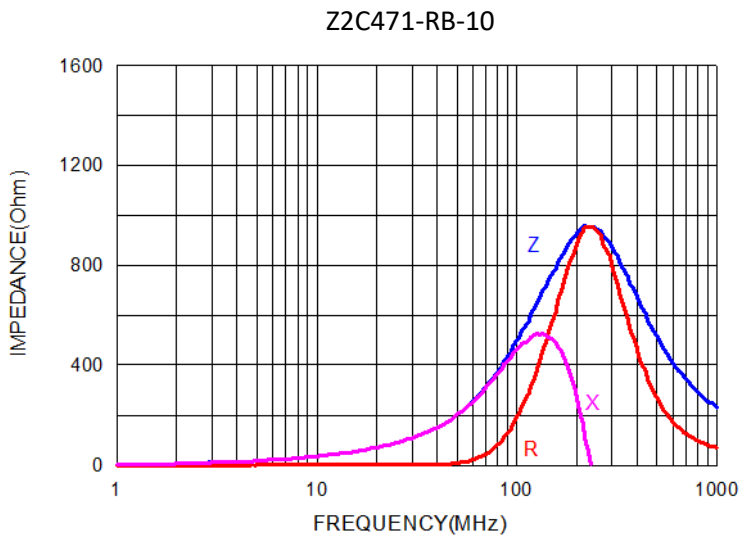

**8. Soldering:**

Mildly activated rosin fluxes are preferred. Our terminations are suitable for all re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

Note:

If wave soldering is used, there will be some risk

Reflow soldering temperatures below 240°C, there will be non-wetting risk

**8-1 Solder Re-flow:**

Recommended temperature profiles for re-flow soldering in Figure 1.

**8-2 Soldering Iron (Figure 2):**

Products attachment with soldering iron is discouraged due to the inherent process control limitations.

In the event that a soldering iron must be employed the following precautions are recommended.

Note :

- a) Preheat circuit and products to 150°C.
- b) 350°C tip temperature (Max.)
- c) Never contact the ceramic with the iron tip
- d) 1.0mm tip diameter (Max.)
- e) Use a 20 watt soldering iron with tip diameter of 1.0mm
- f) Limit soldering time to 4~5 secs.

NOTE: Specifications subject to change without notice. Please check our website for latest information.



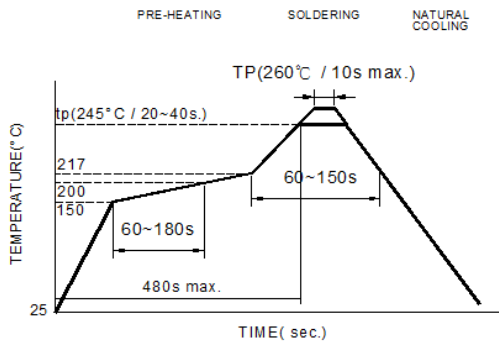


Figure 1. Re-flow Soldering:3 times max

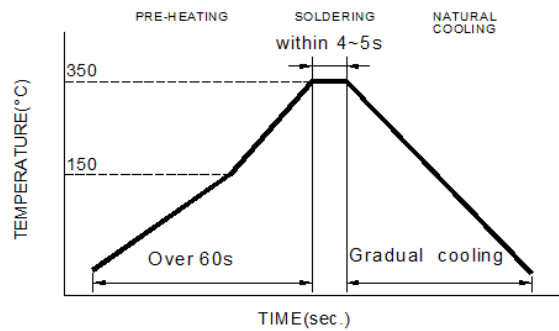


Figure 2. Wave Soldering:1 times max

**8-3 Soldering Volume:**

By increasing the solder volume, the mechanical stress to product is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance. Solder shall be used not to be exceeded as shown in Figure 3. Minimum fillet height = soldering thickness +25% product height


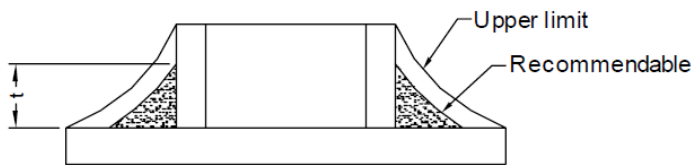


Figure 3

**9. Packaging Information:**

**9-1 Reel Dimension**

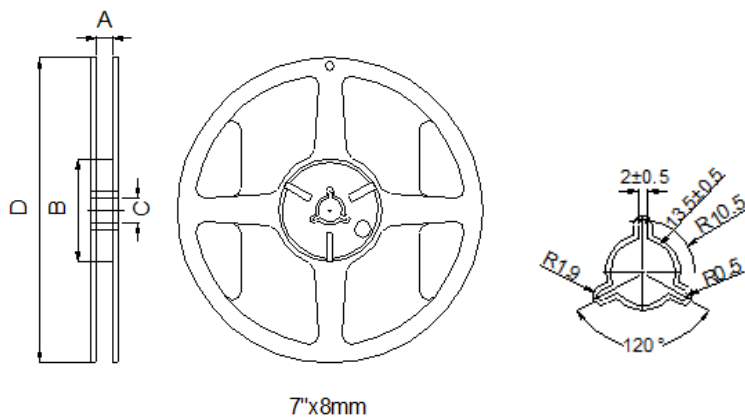


7"x8mm

A(mm)	B(mm)	C(mm)	D(mm)
9.0±0.5	60±2	13.5±0.5	178±2

NOTE: Specifications subject to change without notice. Please check our website for latest information.

9-2 Tape Dimension

Material of taping is paper

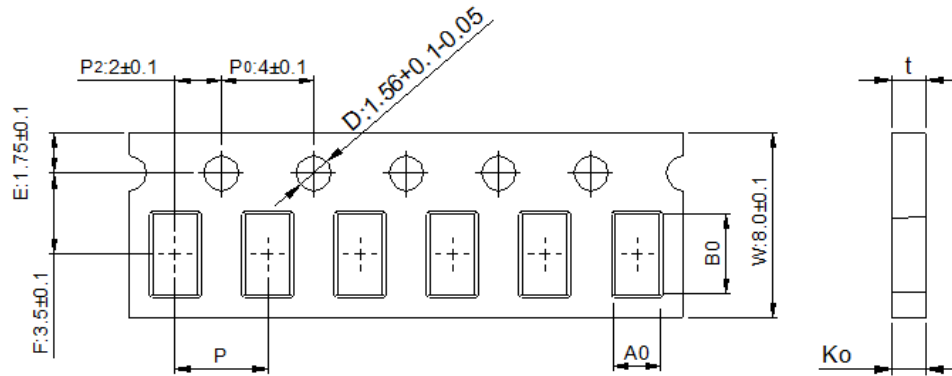


Size	Bo(mm)	Ao(mm)	Ko(mm)	P(mm)	t(mm)
Z2	1.80±0.05	0.96+0.05/-0.03	0.95±0.05	4.00±0.10	0.95±0.05

9-3 Packaging Quantity

Chip Size	Z2
Chip/Reel	4000

9-4 Tearing Off Force

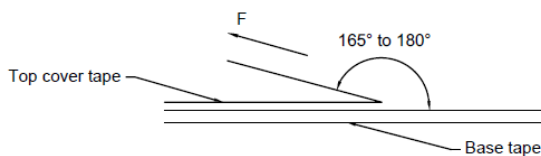

The force for tearing off cover tape is 15 to 60 grams in the arrow direction under the following conditions.

Room Temp. (°C)	Room Humidity (%)	Room atm (hPa)	Tearing Speed mm/min
5~35	45~85	860~1060	300

**Application Notice:**

1. Storage Conditions:

To maintain the solderability of terminal electrodes:

- a) Recommended products should be used within 12 months from the time of delivery.
- b) The packaging material should be kept where no chlorine or sulfur exists in the air.

2. Transportation:

- a) Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- b) Vacuum pick up is strongly recommended for individual components.
- c) Bulk handling should ensure that abrasion and mechanical shock are minimized

NOTE: Specifications subject to change without notice. Please check our website for latest information.