


1. Part No. Expression

P I C 1 2 6 5 H P R 1 5 M F

(a) (b) (c) (d) (e) (f)

- | | |
|--------------------|---------------------|
| (a) Series Code | (d) Inductance Code |
| (b) Dimension Code | (e) Tolerance Code |
| (c) Material Code | (f) Packaging Code |

2. Configuration & Dimensions (Unit: mm)

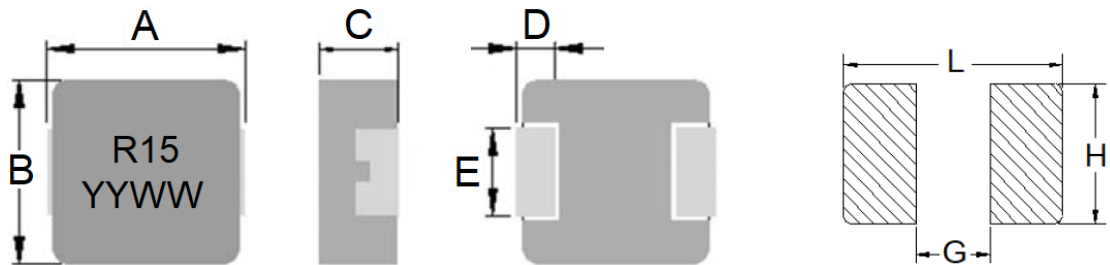


Recommended PCB Layout

- Note:
1. The above PCB layout reference only.
 2. Recommend solder paste thickness at 0.15 mm and above.
 3. Marking: Top= Inductance Code, Bottom=YYWW (Year/World week), Black


A	B	C	D	E	L	G	H
13.5±0.5	12.5±0.3	6.2±0.3	2.3±0.3	4.7±0.3	14.2 Ref	8.0 Ref	5.0 Ref

NOTE: Specifications subject to change without notice. Please check our website for latest information.

3. Schematic



4. Material List



NO	Items
(a)	Core
(b)	Wire
(c)	Clip
(d)	Ink
(e)	Paint

5. General Specifications

- (a) Operating Temp.: - 40°C to + 125°C (including self-temperature rise)
- (b) Storage Temp.: - 40°C to + 125°C (on board)
- (c) All test data referenced to 25°C ambient.
- (d) Heat Rated Current (Irms) will cause the coil temperature rise approximately ΔT of 40°C.
- (e) Saturation Current (Isat) will cause inductance L0 to drop approximately 30%.
- (f) Rated DC Current: The lower value of Irms and Isat.
- (g) Part Temperature (Ambient + Temp. Rise): Should not exceed 125°C under worst case operating conditions.
- (h) Maximum Operating Voltage: 80V
- (i) Storage Condition (Component in its packaging)
 - i) Temperature: Less than 40°C
 - ii) Humidity: Less than 60% RH

NOTE: Specifications subject to change without notice. Please check our website for latest information.


6. Electrical Characteristics

Part Number	Inductance (μ H) @0A $\pm 20\%$	Test Frequency	Irms (A) Typ	Isat (A) Typ	DCR (m Ω)	
					Typ	Max
PIC1265HPR15MF	0.15	1.0V/100KHz	55.0	118	0.49	0.60
PIC1265HPR22MF	0.22	1.0V/100KHz	53.0	112	0.47	0.60
PIC1265HPR30MF	0.30	1.0V/100KHz	48.0	72.0	0.60	0.72
PIC1265HPR33MF	0.33	1.0V/100KHz	46.0	68.0	0.65	0.80
PIC1265HPR36MF	0.36	1.0V/100KHz	45.0	66.0	0.70	0.90
PIC1265HPR40MF	0.40	1.0V/100KHz	44.0	64.0	0.70	1.00
PIC1265HPR45MF	0.45	1.0V/100KHz	42.0	63.0	0.90	1.20
PIC1265HPR47MF	0.47	1.0V/100KHz	41.0	63.0	0.90	1.20
PIC1265HPR50MF	0.50	1.0V/100KHz	40.0	60.0	0.92	1.25
PIC1265HPR56MF	0.56	1.0V/100KHz	37.0	58.0	1.05	1.20
PIC1265HPR68MF	0.68	1.0V/100KHz	35.0	55.0	1.25	1.50
PIC1265HPR82MF	0.82	1.0V/100KHz	33.0	50.0	1.50	1.90
PIC1265HP1R0MF	1.00	1.0V/100KHz	30.0	48.0	1.70	2.30
PIC1265HP1R5MF	1.50	1.0V/100KHz	27.0	45.0	2.50	3.00
PIC1265HP1R8MF	1.80	1.0V/100KHz	24.0	40.0	3.60	4.00
PIC1265HP2R2MF	2.20	1.0V/100KHz	22.0	37.0	3.80	4.20
PIC1265HP2R7MF	2.70	1.0V/100KHz	20.0	32.0	4.30	5.50
PIC1265HP3R3MF	3.30	1.0V/100KHz	18.0	30.0	5.70	6.80
PIC1265HP4R7MF	4.70	1.0V/100KHz	13.5	28.0	7.00	8.40
PIC1265HP5R6MF	5.60	1.0V/100KHz	12.5	23.0	8.50	10.0
PIC1265HP6R8MF	6.80	1.0V/100KHz	11.5	18.0	9.50	11.5
PIC1265HP7R0MF	7.00	1.0V/100KHz	11.2	17.7	10.0	12.3
PIC1265HP8R2MF	8.20	1.0V/100KHz	10.5	16.0	12.0	15.5
PIC1265HP100MF	10.0	1.0V/100KHz	10.0	15.5	13.2	16.5
PIC1265HP120MF	12.0	1.0V/100KHz	9.50	14.0	16.0	20.0
PIC1265HP130MF	13.0	1.0V/100KHz	9.00	13.0	21.0	24.0
PIC1265HP150MF	15.0	1.0V/100KHz	9.00	12.5	23.2	28.0
PIC1265HP220MF	22.0	1.0V/100KHz	9.00	12.0	32.5	37.0
PIC1265HP330MF	33.0	1.0V/100KHz	8.00	11.0	48.0	58.0
PIC1265HP470MF	47.0	1.0V/100KHz	6.50	9.50	76.0	90.0
PIC1265HP101MF	100	1.0V/100KHz	2.50	3.50	180	200


NOTE: Specifications subject to change without notice. Please check our website for latest information.

7. Characteristics Curve


PIC1265HPR15MF

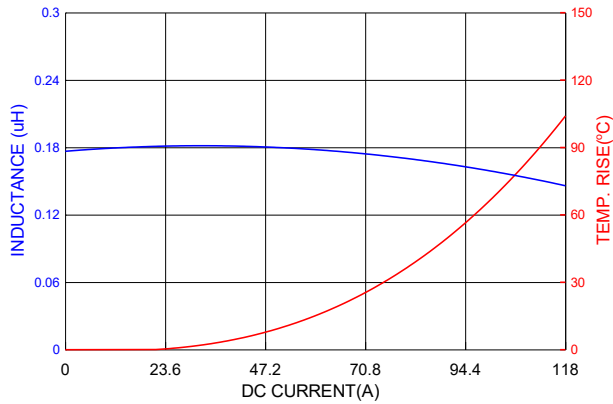


PIC1265HPR22MF

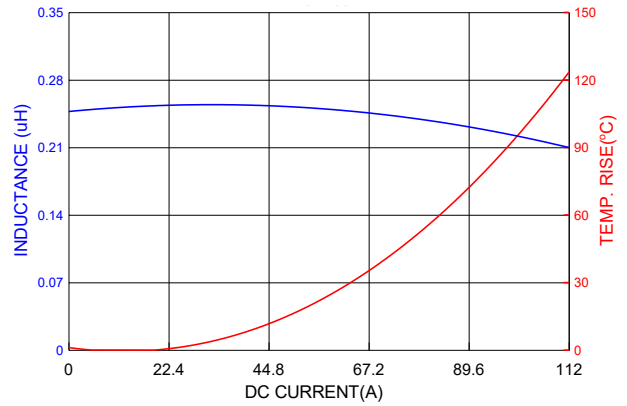


PIC1265HPR30MF

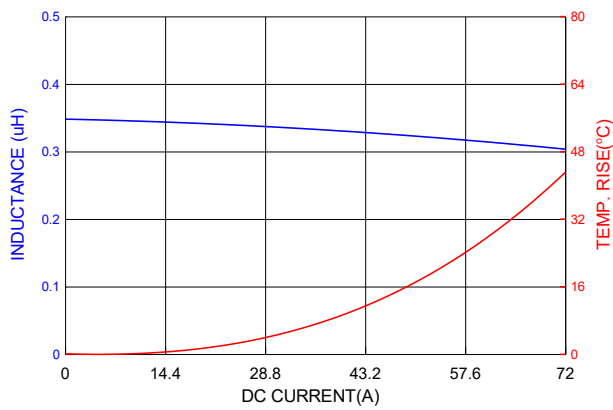


PIC1265HPR33MF

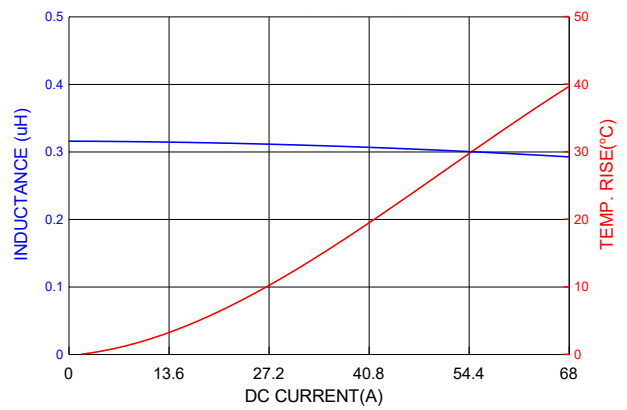

PIC1265HPR36MF

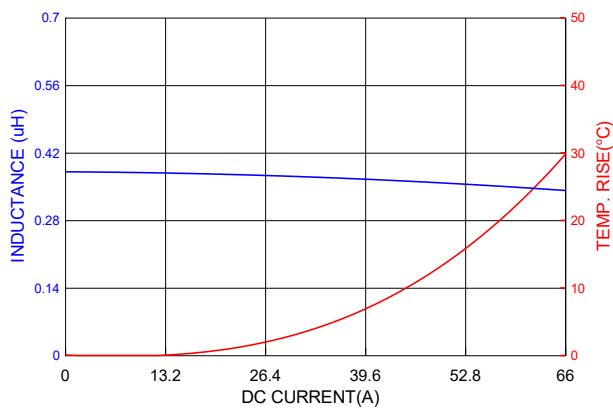


PIC1265HPR40MF

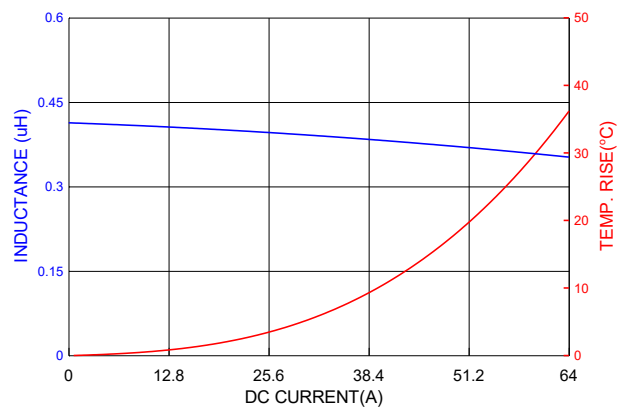


NOTE: Specifications subject to change without notice. Please check our website for latest information.


PIC1265HPR45MF

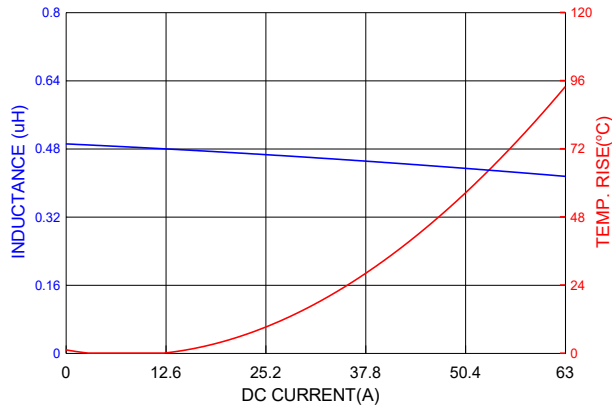


PIC1265HPR47MF

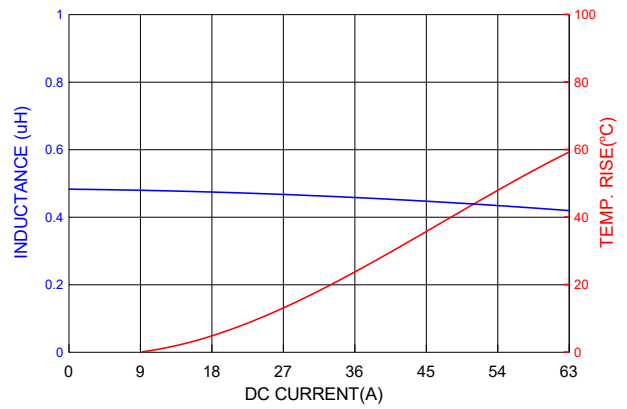


PIC1265HPR50MF

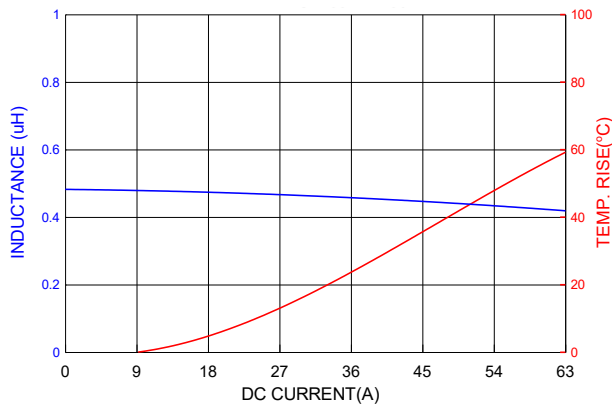


PIC1265HPR56MF

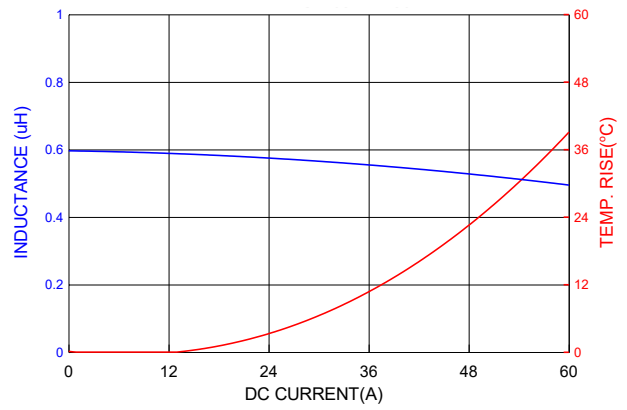

PIC1265HPR68MF

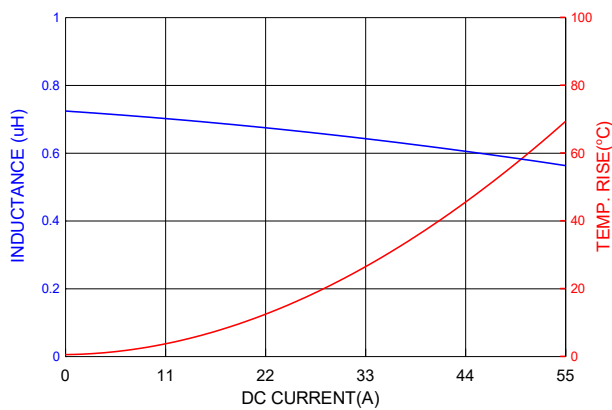


PIC1265HPR82MF

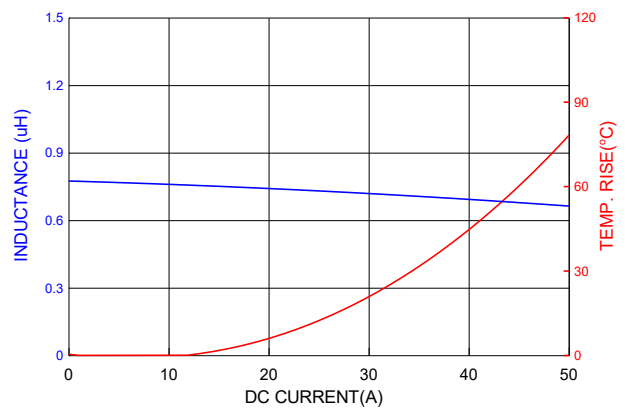


NOTE: Specifications subject to change without notice. Please check our website for latest information.


PIC1265HP1R0MF

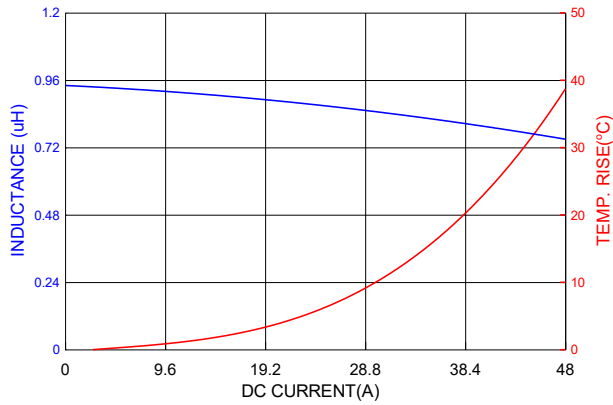


PIC1265HP1R5MF

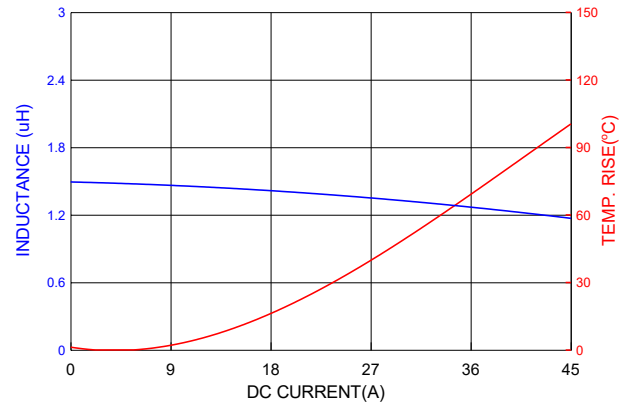


PIC1265HP1R8MF

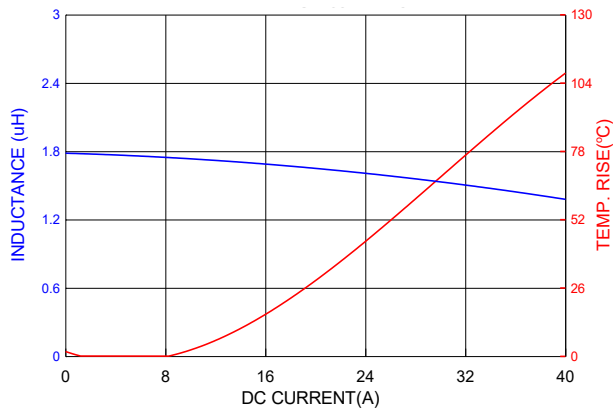


PIC1265HP2R2MF

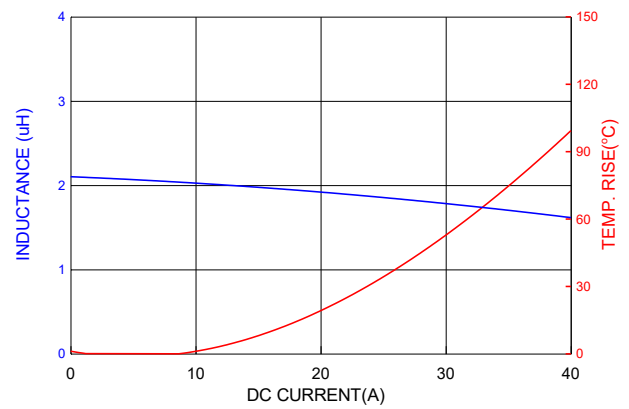

PIC1265HP2R7MF

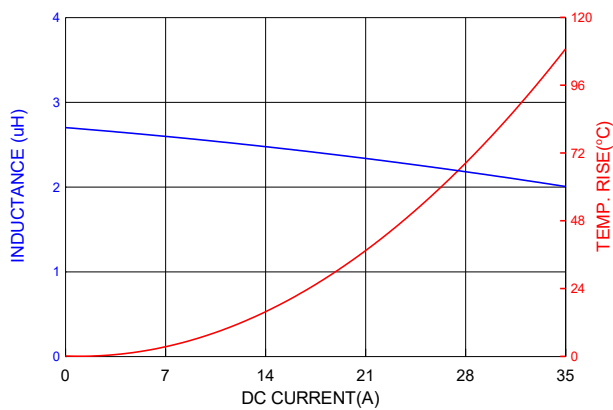


PIC1265HP3R3MF

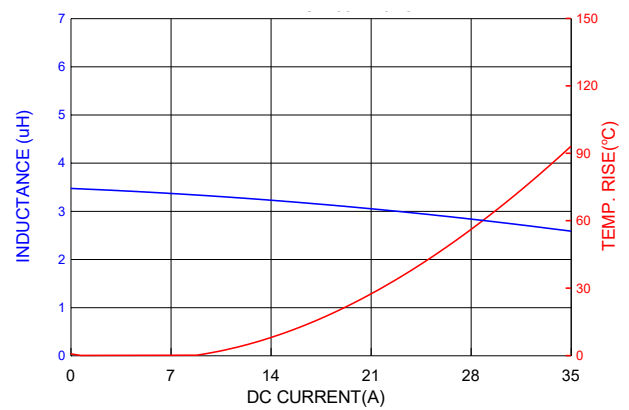


NOTE: Specifications subject to change without notice. Please check our website for latest information.


PIC1265HP4R7MF

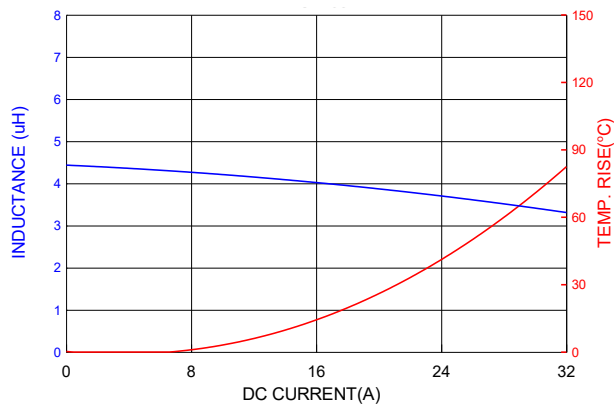


PIC1265HP5R6MF

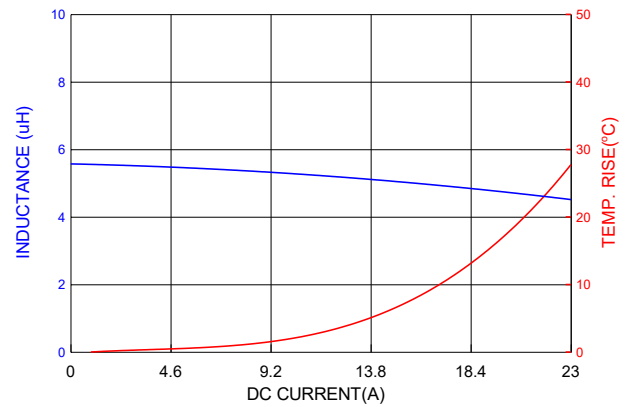


PIC1265HP6R8MF

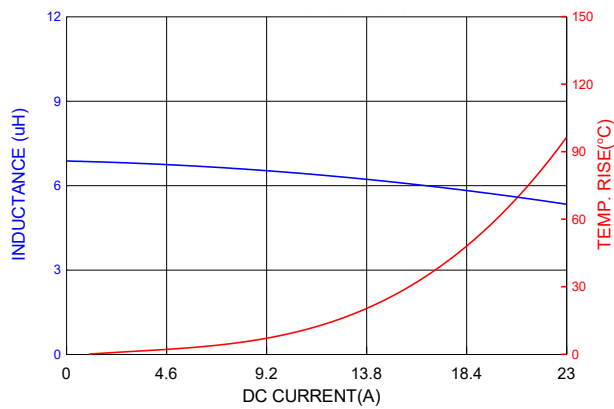


PIC1265HP7R0MF

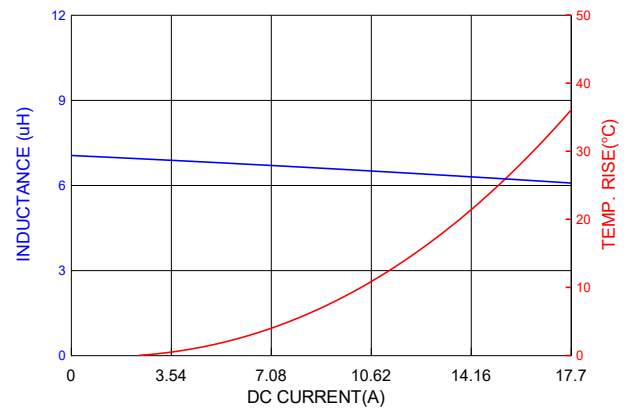







PIC1265HP8R2MF

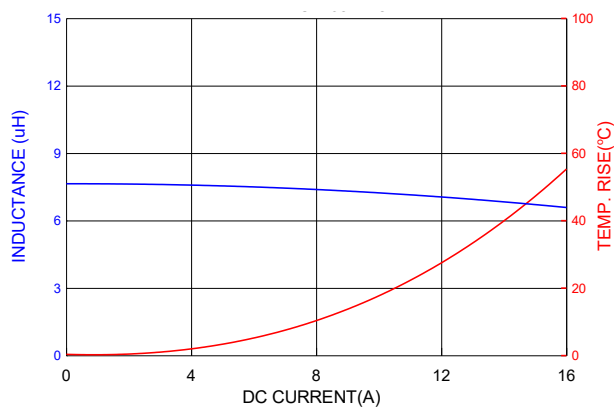


PIC1265HP100MF

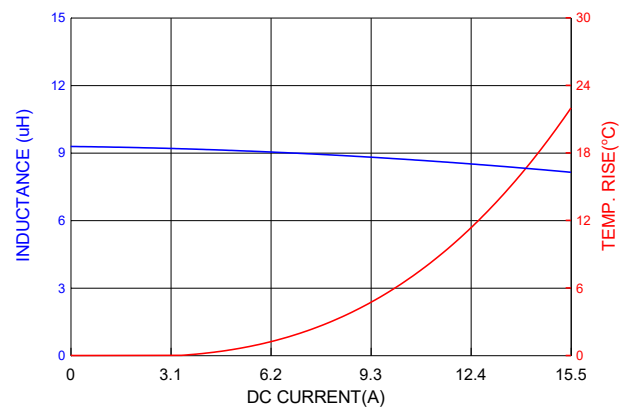

NOTE: Specifications subject to change without notice. Please check our website for latest information.

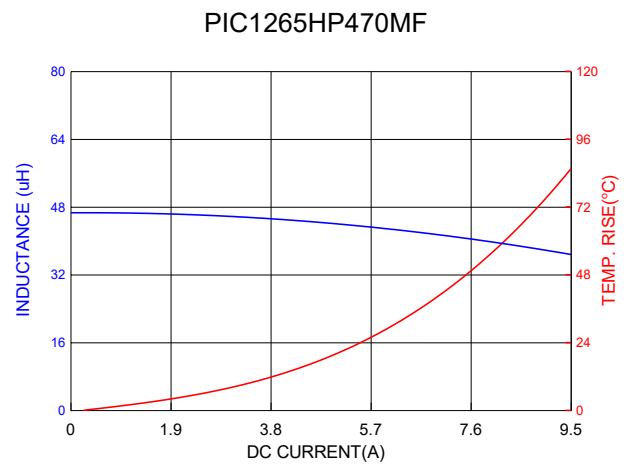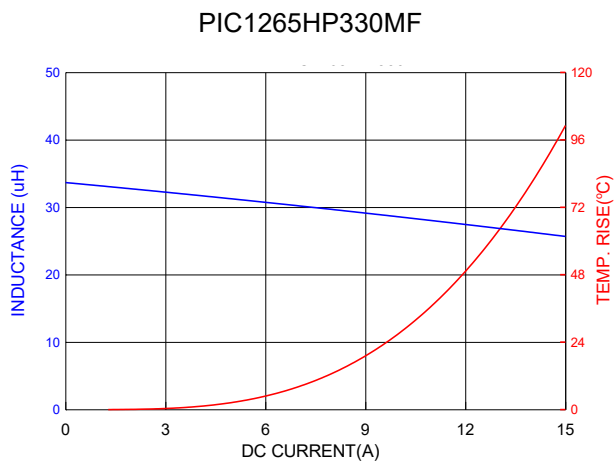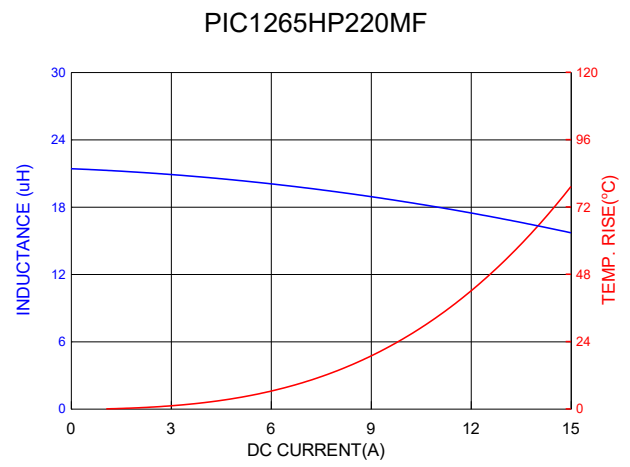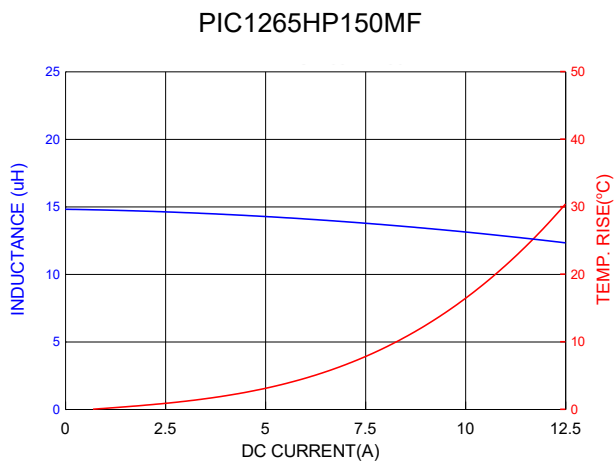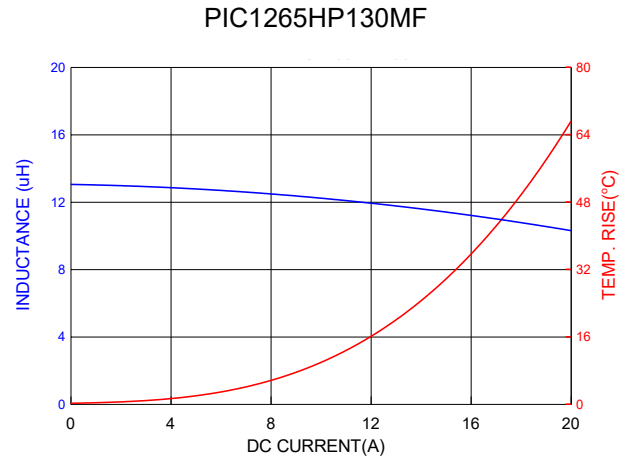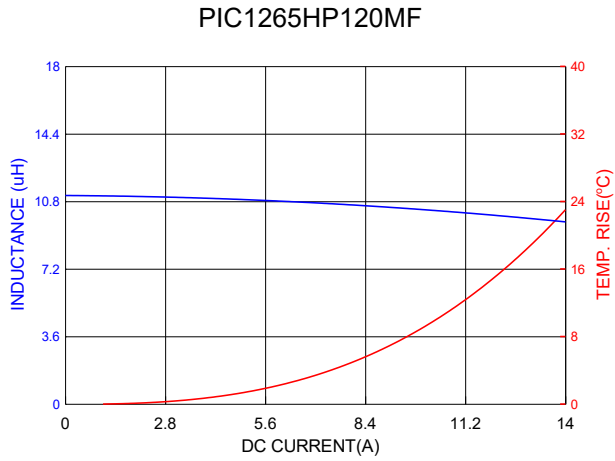

NOTE: Specifications subject to change without notice. Please check our website for latest information.

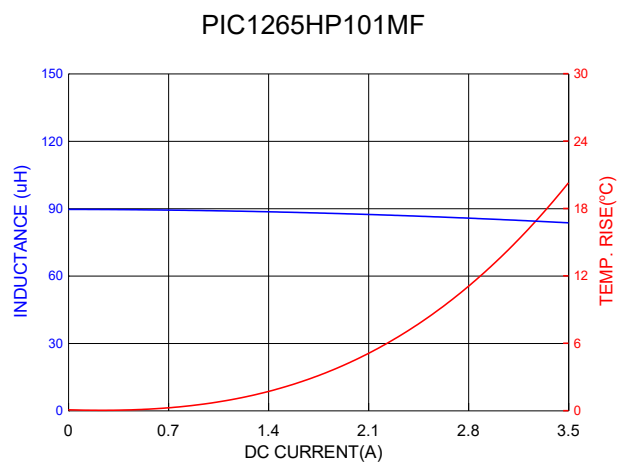

NOTE: Specifications subject to change without notice. Please check our website for latest information.



8. Soldering Specification

Mildly activated rosin fluxes are preferred. Our terminations are suitable for re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

8-1. IR Soldering Reflow


Recommended temperature profiles for lead free re-flow soldering in Figure 1, Table 1.1 & 1.2 (J-STD-020E).

8-2. Iron Reflow

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended (Figure 2).


Note:

- Preheat circuit and products to 150°C.
- 355°C tip temperature (Max.)
- Never contact the ceramic with the iron tip
- 1.0mm tip diameter (Max.)
- Use a 20 watt soldering iron with tip diameter of 1.0mm
- Limit soldering time to 4~5 sec.

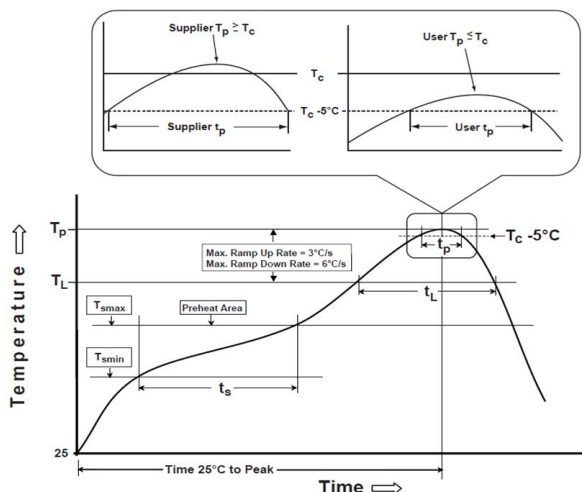

Reflow times: 3 times Max

Figure 1: IR Soldering Reflow

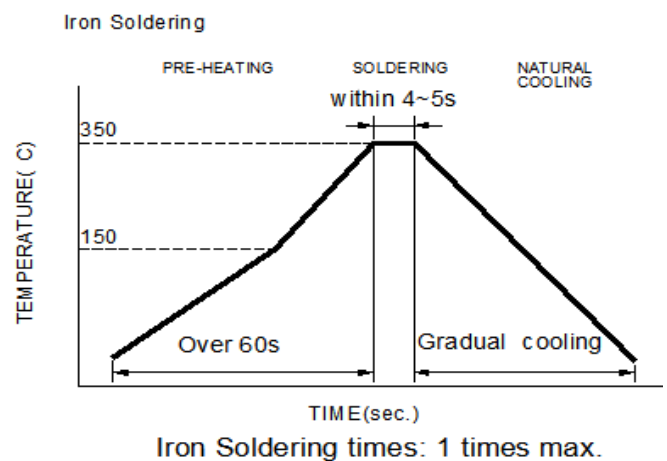

Soldering iron method: 350±5°C Max

Figure 2: Iron soldering temperature profiles

NOTE: Specifications subject to change without notice. Please check our website for latest information.

Table (1.1) Reflow Profiles

Profile Type:	Pb-Free Assembly
Preheat	
-Temperature Min (T_{smin})	150°C
-Temperature Max (T_{smax})	200°C
-Time (t_s) from (T_{smin} to T_{smax})	60-120seconds
Ramp-up rate (T_L to T_p)	3°C /second max.
Liquids temperature (T_L)	217°C
Time (t_L) maintained above T_L	60-150 seconds
Classification temperature (T_c)	See Table (1.2)
Time (t_p) at $T_c - 5^\circ\text{C}$ (T_p should be equal to or less than T_c .)	* < 30 seconds
Ramp-down rate (T_p to T_L)	6°C /second max.
Time 25°C to peak temperature	8 minutes max.

T_p: maximum peak package body temperature, **T_c**: the classification temperature.

For user (customer) **T_p** should be equal to or less than **T_c**.

*Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

Table (1.2) Package Thickness/Volume and Classification Temperature (T_c)


	Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
PB-Free Assembly	<1.6mm	260°C	260°C	260°C
	1.6-2.5mm	260°C	250°C	245°C
	≥2.5mm	250°C	245°C	245°C

Reflow is referred to standard IPC/JEDEC J-STD-020E.

NOTE: Specifications subject to change without notice. Please check our website for latest information.


9. Packaging Information

9-1. Reel Dimension (Unit: mm)

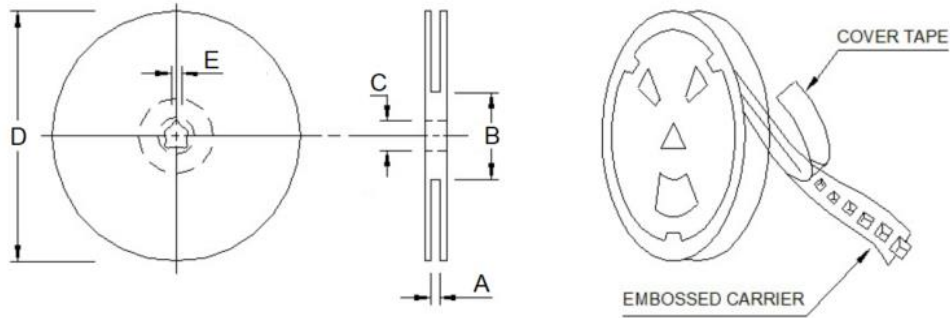

Type	A	B	C	D	E
13"x24mm	24.4+2.0/-0.0	100.0±2.0	13.0+0.5/-0.2	330.0	2.0±0.5

9-2. Tape Dimension (Unit: mm)

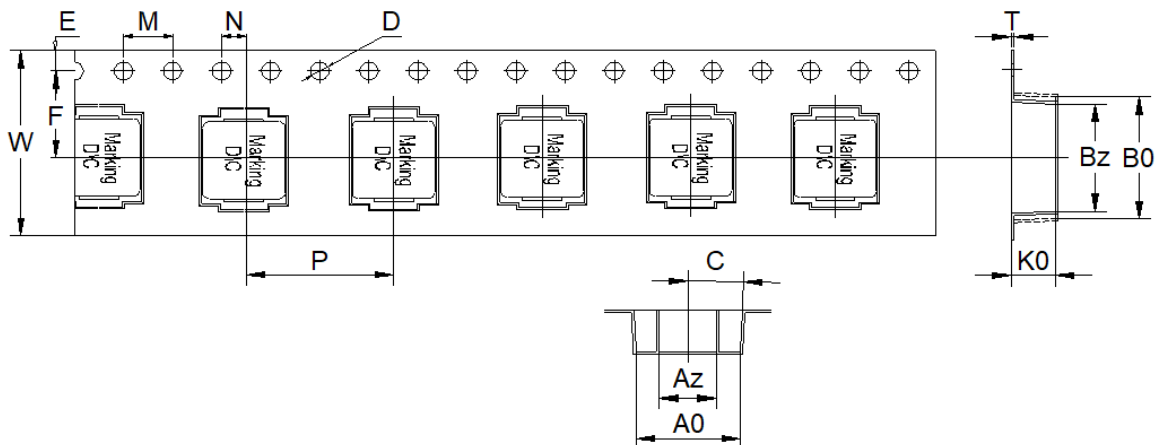


B0	Bz	A0	Az	K0	P	W
14.10±0.10	13.00±0.10	12.90±0.10	7.00±0.10	7.00±0.10	16.00±0.10	24.00±0.30
F	T	E	M	N	D	C
11.50±0.10	0.35±0.05	1.75	4.00	2.00	1.50	3°

NOTE: Specifications subject to change without notice. Please check our website for latest information.

9-3. Packaging Quantity (Unit: Pcs)

Chip/ Reel	500
Inner box	1,000
Carton	4,000

9-4. Tearing Off Force

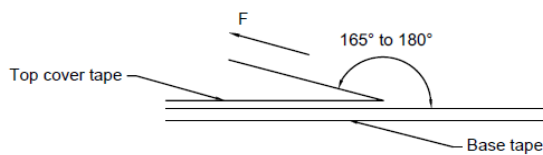

The force for tearing off cover tape is according to the follow table, in the arrow direction under the following conditions.

(Referenced ANSI/EIA-481-D-2008 of 4.11 standard)

Room Temp. (°C)	Room Humidity (%)	Room atm (hPa)	Tearing Speed (mm/min)
5~35	45~85	860~1060	300±10

Tape Size	8 mm	12 to 56 mm	72 mm or Wider
Tearing Off Force (grams)	10~100	10~130	10~150

Application Notice

1. Storage Conditions

To maintain the solderability of terminal electrodes:

- (a) Recommended products should be used within 12 months from the time of delivery.
- (b) The packaging material should be kept where no chlorine or sulfur exists in the air.

2. Transportation

- (a) Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- (b) Vacuum pick up is strongly recommended for individual components.
- (c) Bulk handling should ensure that abrasion and mechanical shock are minimized.

NOTE: Specifications subject to change without notice. Please check our website for latest information.