


1. Part No. Expression:

S R X 3 2 4 5 0 1 1 4 0 K S
 (a) (b) (c) (d) (e)

- (a) Series Code (d) Tolerance Code
 (b) Dimension Code (e) Winding Code
 (c) Inductance Code

2. Configuration & Dimensions: (Unit-mm)

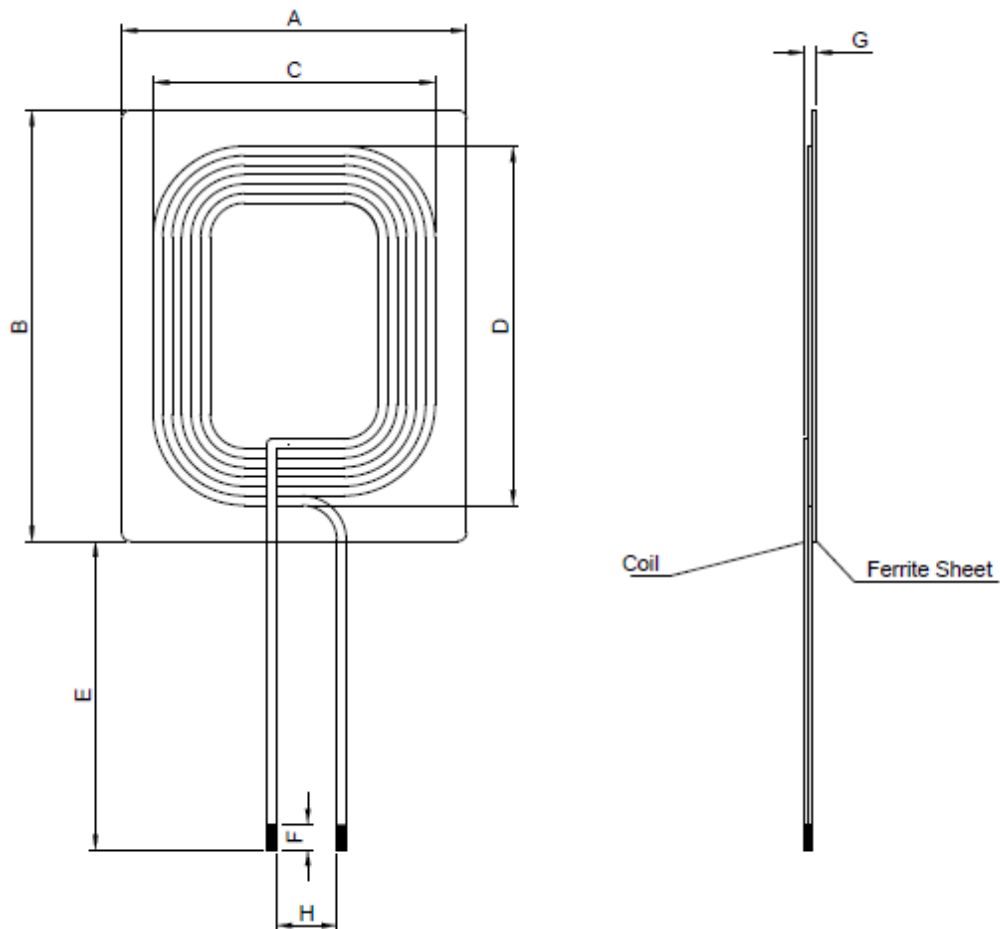

A	B	C	D	E	F	G	H
32.0 Max	45.0 Max	29.0 Ref	36.3 Ref	27.0±2.0	5.0±2.0	1.7 Max	5.0 Ref


NOTE: Specifications subject to change without notice. Please check our website for latest information.

3. Schematic:**4. Electrical Characteristics:**

Inductance (uH)	Test Frequency (Hz)	DCR (mΩ)	Irms (mA)
14.0±10%	1V/100K	355 Max	1200 Max

5. General Specifications:

- (a) Operating Temp.: -40°C ~ +85°C
- (b) Storage Temp.: -40°C ~ +85°C (packaging)
- (c) Irms: Based on temp. rise up to 40°C Max.
- (d) Power Rating: 5W

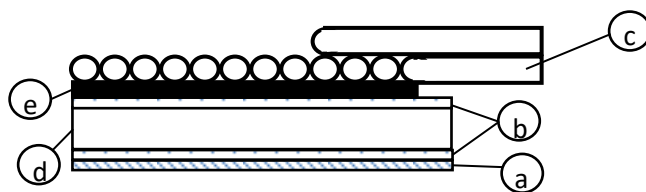6. Material List:

- (a) Release Film
- (b) PET Film
- (c) Wire
- (d) Ferrite Sheet (MnZn)
- (e) Adhesive

NOTE: Specifications subject to change without notice. Please check our website for latest information.