


1. Part No. Expression:

S R X 3 2 4 8 0 1 1 2 0 K B A

(a) (b) (c) (d) (e)

- | | |
|---------------------|--------------------|
| (a) Series Code | (d) Tolerance Code |
| (b) Dimension Code | (e) Winding Code |
| (c) Inductance Code | |

2. Configuration & Dimensions: (Unit-mm)

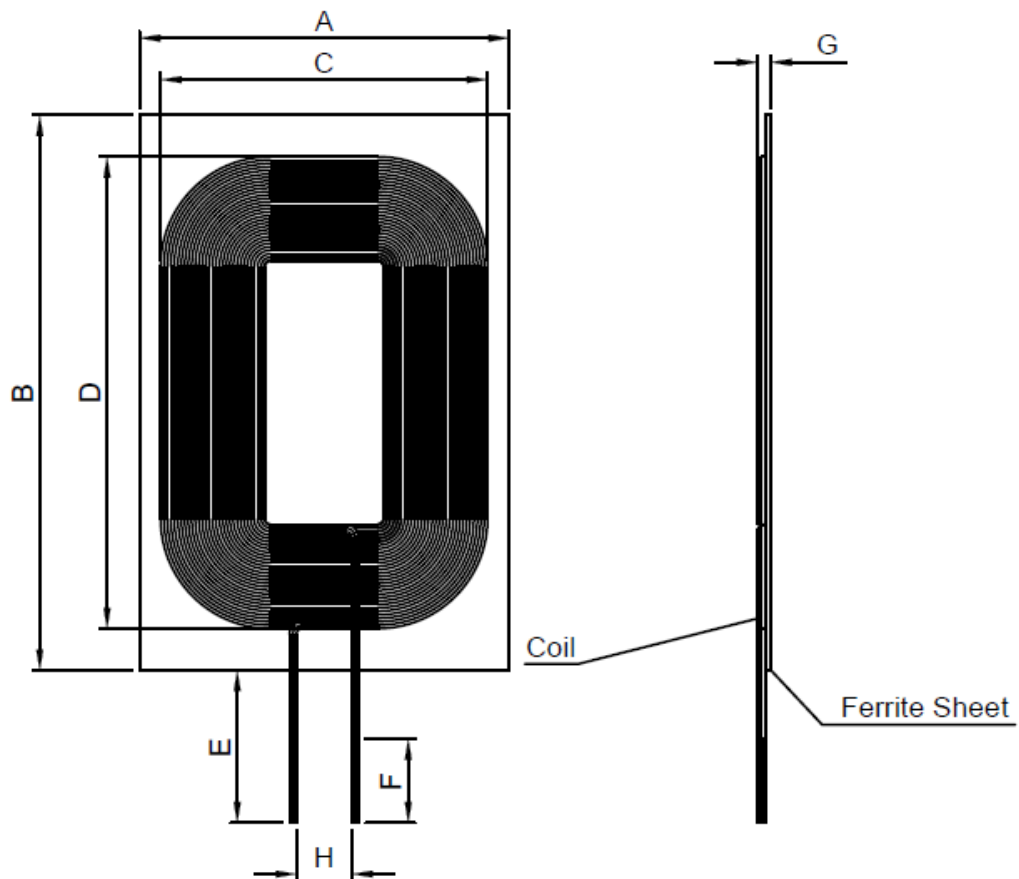

A	B	C	D	E	F	G	H
32.0±0.5	48.0±0.5	31.0 Ref	41.2 Ref	25.0±2.0	5.0±2.0	1.5 Max	5.0 Ref


NOTE: Specifications subject to change without notice. Please check our website for latest information.

3. Schematic:**4. Electrical Characteristics:**

Inductance (uH)	Test Frequency (Hz)	DCR (mΩ)	I _{rms} (mA)
12.0±10%	1V/100K	200 Max	3000 Max

5. General Specifications:

- (a) Operating Temp.: -40°C ~ +85°C
- (b) Storage Temp.: -40°C ~ +85°C (packaging)
- (c) I_{rms}: Based on temp. rise up to 40°C Max.
- (d) Power Rating: 5W

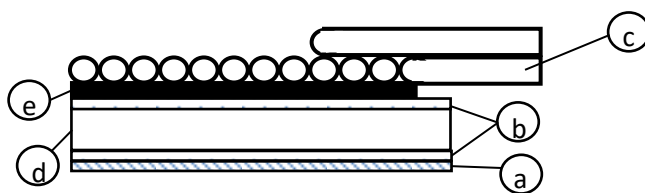6. Material List:

- (a) Release Film
- (b) PET Film
- (c) Wire
- (d) Ferrite Sheet (MnZn)
- (e) Adhesive

NOTE: Specifications subject to change without notice. Please check our website for latest information.