


1. Part No. Expression

W A E L 4 4 5 R 0 - R K - 1 0

(a) (b) (c) (d) (e) (f)

- | | |
|---------------------|--------------------|
| (a) Series Code | (d) Packaging Code |
| (b) Material Code | (e) Current Code |
| (c) Inductance Code | (f) Internal Code |


2. Configuration & Dimensions (Unit: mm)

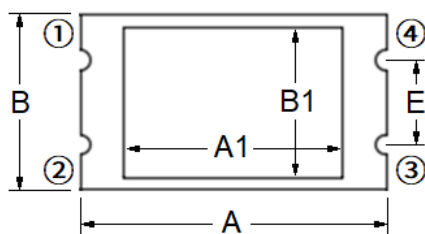


Top View



Side View

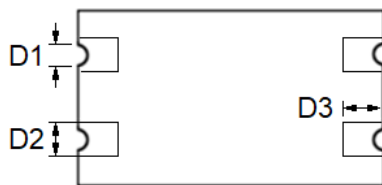

Bottom View

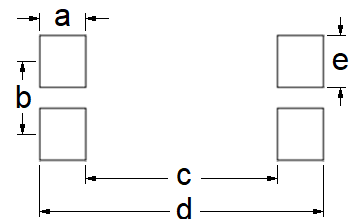

Recommended PCB Layout


Note: The above PCB layout reference only.

Material Code	A	B	C	A1	B1	C1	D1	D2
L44	9.10±0.20	5.17±0.20	3.80±0.20	4.50±0.20	3.20±0.20	2.80±0.20	0.60±0.10	1.00±0.10
L46				6.50±0.30	4.50±0.20	2.70±0.20		


Material Code	D3	E	a	b	c	d	e	-
L44	1.20±0.10	2.50±0.20	1.60 Ref	2.54 Ref	6.70 Ref	9.90 Ref	1.80 Ref	-
L46								

NOTE: Specifications subject to change without notice. Please check our website for latest information.

3. Schematic

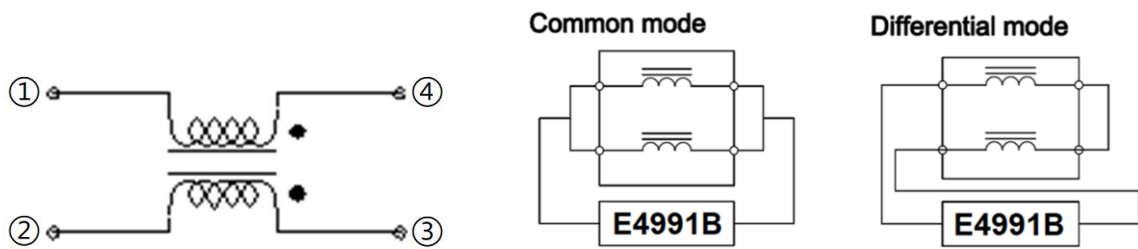

4. Material List

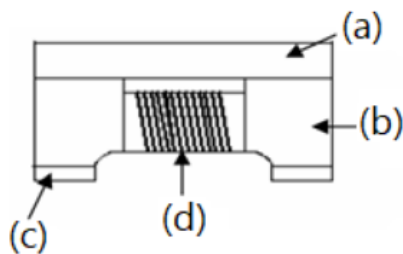

- (a) Upper Plate
- (b) Core
- (c) Termination
- (d) Wire

5. General Specifications





- (a) Operating Temp.: - 40°C to + 105°C (including self-temperature rise)
- (b) Storage Temp.: - 40°C to +125°C (on board)
- (c) All test data referenced to 25°C ambient.
- (d) Heat Rated Current (I_{rms}) will cause the coil temperature rise ΔT of 40°C Max.
- (e) Storage Condition (Component in its packaging)
 - i) Temperature: Less than 40°C
 - ii) Humidity: Less than 60% RH

NOTE: Specifications subject to change without notice. Please check our website for latest information.

6. Electrical Characteristics

Part Number	Inductance (μ H) +50%/-30% (1-4)(2-3)	Test Frequency	DCR (Ω) (1-4)(2-3)		Rated Current (mA) Max	L _{Stray} (nH) Typ	V _{test} (V _{DC}) 2s
			Typ	Max			
WAE445R0-RK-10	5.0	0.1V/100KHz	0.06	0.10	1.2	40	250
WAE46110-RJ-10	11.0	0.1V/100KHz	0.08	0.12	1.0	50	250
WAE46250-RK-10	25.0	0.1V/100KHz	0.11	0.17	1.0	60	250
WAE46510-RH-10	51.0	0.1V/100KHz	0.30	0.35	0.8	70	250

7. Characteristics Curve

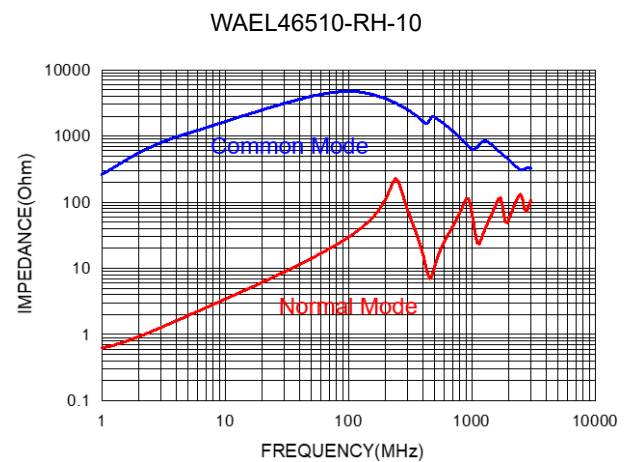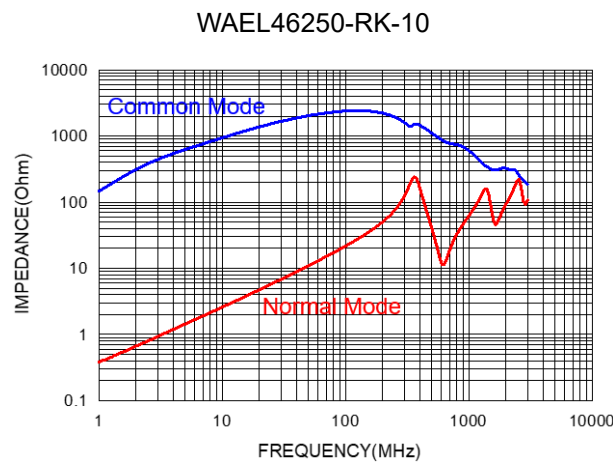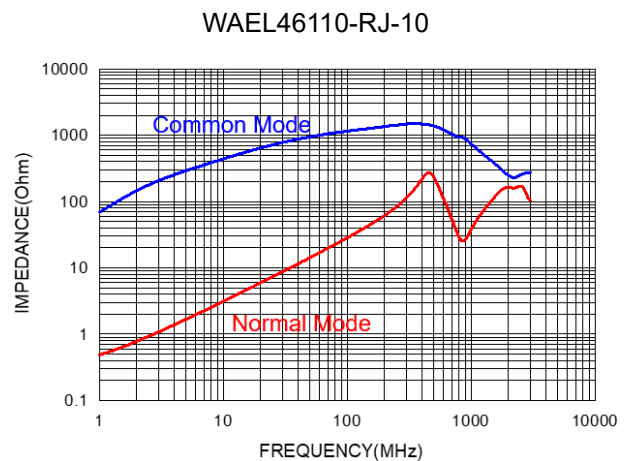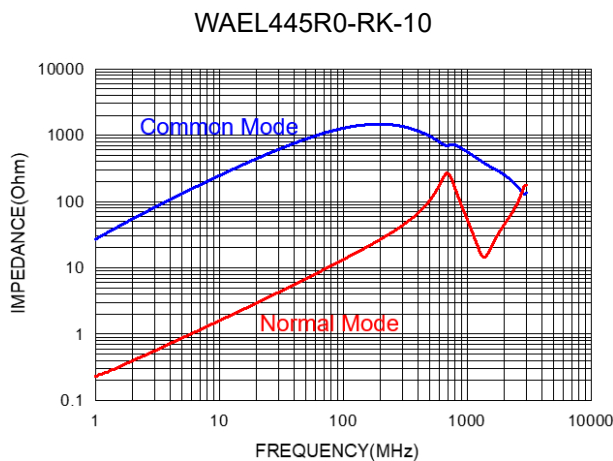

NOTE: Specifications subject to change without notice. Please check our website for latest information.

8. Soldering Specification

Mildly activated rosin fluxes are preferred. Our terminations are suitable for re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

8-1. IR Soldering Reflow


Recommended temperature profiles for lead free re-flow soldering in Figure 1, Table 1.1 & 1.2 (J-STD-020E).

8-2. Iron Reflow

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended (Figure 2).


Note:

- Preheat circuit and products to 150°C.
- 355°C tip temperature (Max.)
- Never contact the ceramic with the iron tip
- 1.0mm tip diameter (Max.)
- Use a 20 watt soldering iron with tip diameter of 1.0mm
- Limit soldering time to 4~5 sec.

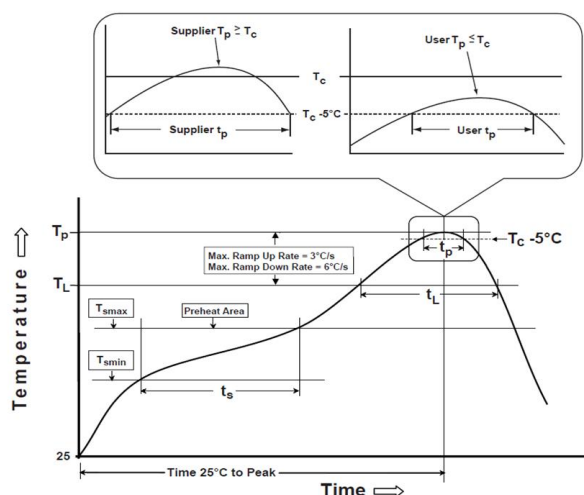

Reflow times: 3 times Max

Figure 1: IR Soldering Reflow

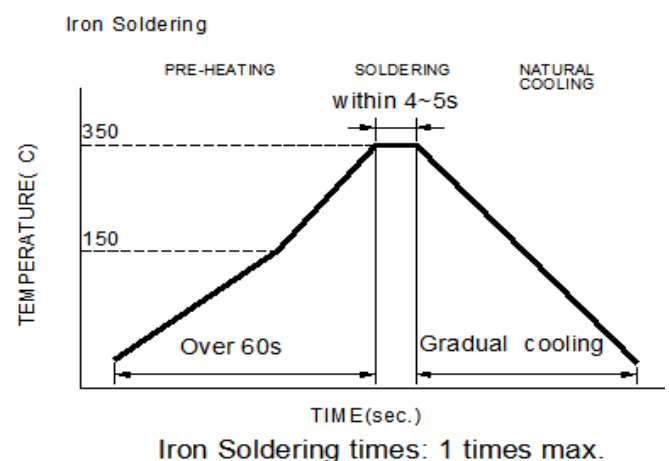

Soldering iron method: 350±5°C Max

Figure 2: Iron soldering temperature profiles

NOTE: Specifications subject to change without notice. Please check our website for latest information.

Table (1.1) Reflow Profiles

Profile Type:	Pb-Free Assembly
Preheat	
-Temperature Min (T_{smin})	150°C
-Temperature Max (T_{smax})	200°C
-Time (t_s) from (T_{smin} to T_{smax})	60-120seconds
Ramp-up rate (T_L to T_p)	3°C /second max.
Liquids temperature (T_L)	217°C
Time (t_L) maintained above T_L	60-150 seconds
Classification temperature (T_c)	See Table (1.2)
Time (t_p) at $T_c - 5^\circ\text{C}$ (T_p should be equal to or less than T_c .)	* < 30 seconds
Ramp-down rate (T_p to T_L)	6°C /second max.
Time 25°C to peak temperature	8 minutes max.

T_p : maximum peak package body temperature, **T_c** : the classification temperature.

For user (customer) **T_p** should be equal to or less than **T_c** .

*Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

Table (1.2) Package Thickness/Volume and Classification Temperature (T_c)


	Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
PB-Free Assembly	<1.6mm	260°C	260°C	260°C
	1.6-2.5mm	260°C	250°C	245°C
	≥2.5mm	250°C	245°C	245°C

Reflow is referred to standard IPC/JEDEC J-STD-020E.

NOTE: Specifications subject to change without notice. Please check our website for latest information.


9. Packaging Information

9-1. Reel Dimension (Unit: mm)

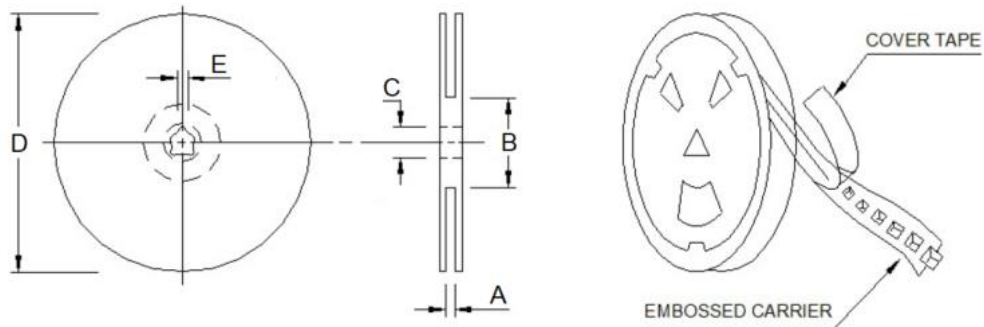

Type	A	B	C	D	E
13"x24mm	24.6±0.5	99.5±1.0	13.5 Ref	330.0±1.0	2.0 Ref

9-2. Tape Dimension (Unit: mm)

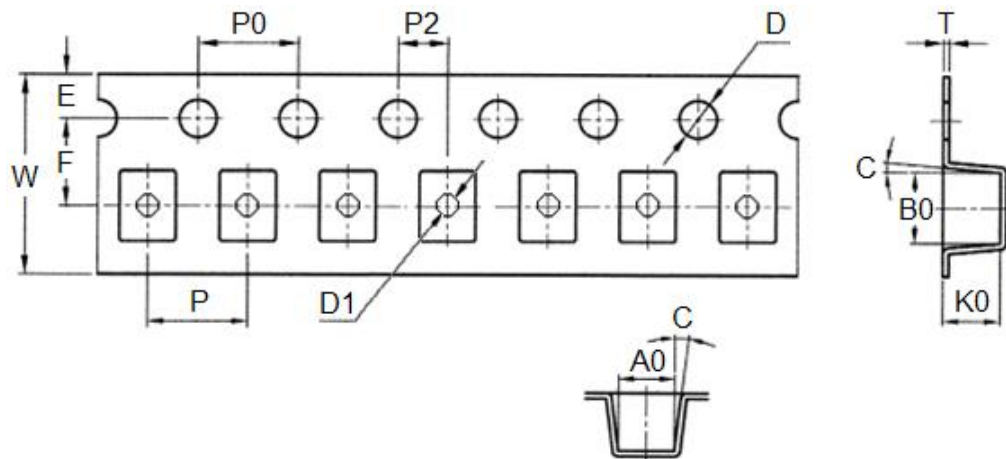


P	P0	P2	B0	A0	D	K0
12.00±0.10	4.00±0.10	2.00±0.10	9.40±0.10	5.50±0.10	1.50+0.10/-0.00	3.90±0.10
D1	E	F	T	C	W	-
1.50±0.10	1.75±0.10	11.50±0.10	0.35±0.05	5°	24.00+0.30/-0.10	-

NOTE: Specifications subject to change without notice. Please check our website for latest information.

9-3. Packaging Quantity (Unit: Pcs)

Chip/ Reel	1,000
Inner Box	2,000
Carton	8,000

9-4. Tearing Off Force

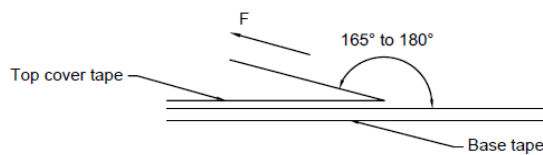

The force for tearing off cover tape is according to the follow table, in the arrow direction under the following conditions.

(Referenced ANSI/EIA-481-D-2008 of 4.11 standard)

Room Temp. (°C)	Room Humidity (%)	Room atm (hPa)	Tearing Speed (mm/min)
5~35	45~85	860~1060	300±10

Tape Size	8 mm	12 to 56 mm	72 mm or Wider
Tearing Off Force (grams)	10~100	10~130	10~150

Application Notice

1. Storage Conditions

To maintain the solderability of terminal electrodes:

- (a) Recommended products should be used within 12 months from the time of delivery.
- (b) The packaging material should be kept where no chlorine or sulfur exists in the air.

2. Transportation

- (a) Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- (b) Vacuum pick up is strongly recommended for individual components.
- (c) Bulk handling should ensure that abrasion and mechanical shock are minimized.

NOTE: Specifications subject to change without notice. Please check our website for latest information.