


1. Part No. Expression

SEPA7HSF - 50370

(a) (b) (c) (d) (e) (f)

- (a) Series Code
- (b) Dimension Code
- (c) Category Code
- (d) Type Code
- (e) Packaging Code
- (f) Internal Code


2. Configuration & Dimensions (Unit: mm)

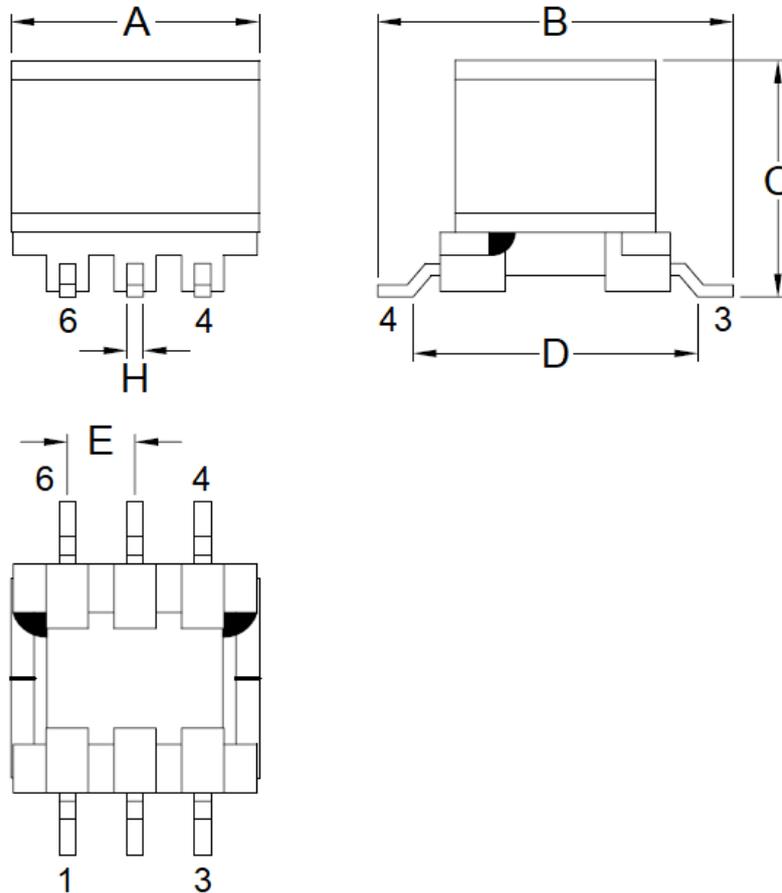

A	B	C	D	E	H
10.82 Max	13.46 Max	8.71 Max	10.62±0.15	2.50±0.20	0.71x0.30 Ref

NOTE: Specifications subject to change without notice. Please check our website for latest information.

3. Schematic

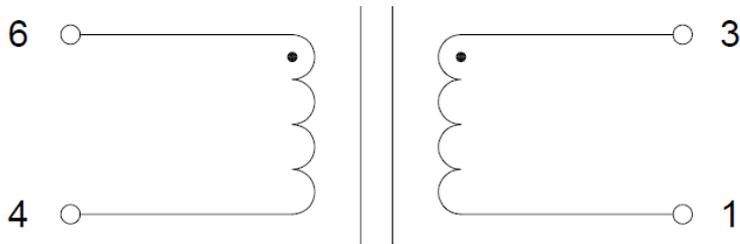

4. Material List

1	Bobbin	Phenolic
2	Core	EP7
3	Wire	Polyurethane DD (2UEW)
5	Tape	Polyester Film
6	Varnish	AV119

5. GENERAL SPECIFICATION

- (a) Operating Temperature Range: -25°C to +105°C
- (b) Insulation Class: B (130°C)

6. ELECTRICAL CHARACTERISTICS

Impedance (uH) 6-4		Test Frequency	DCR (Ω) Max @25°C	
Min	±5%		6-4	3-1
22.0	26.0	1V/100KHz	0.09	0.05

NOTE: Specifications subject to change without notice. Please check our website for latest information.