


1. Part No. Expression

S U U A 9 V T F - 5 0 0 9 2

(a) (b) (c) (d) (e) (f)

- (a) Series Code
- (b) Dimension Code
- (c) Category Code
- (d) Type Code
- (e) Packaging Code
- (f) Internal Code


2. Configuration & Dimensions (Unit: mm)

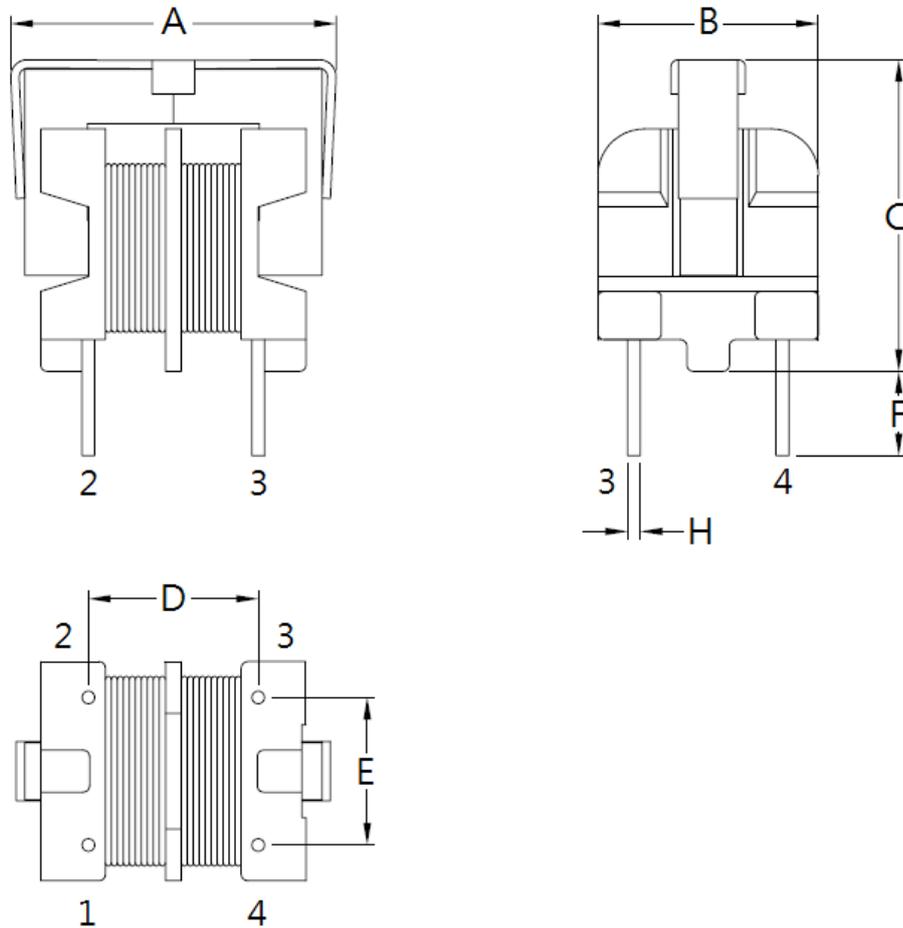

A	B	C	D	E	F	H
16.00 Max	11.00 Max	16.00 Max	8.00±0.30	7.00±0.30	4.00±0.50	Ø0.60 Ref

NOTE: Specifications subject to change without notice. Please check our website for latest information.

3. Schematic

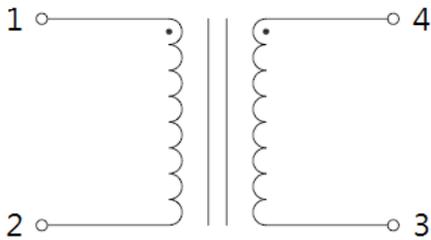

4. Material List

1	Bobbin	Phenolic
2	Core	UU9.8
3	Wire	Polyurethane DD (1UEW)
5	Varnish	Synthite
6	Clip	UU9.8

5. GENERAL SPECIFICATION

- (a) Operating Temperature Range: -10°C to +85°C
- (b) Insulation Class: A (105°C)

6. ELECTRICAL CHARACTERISTICS

Inductance (mH) Min 1-2	Test Frequency	DCR (Ω) Max @25°C	
		1-2	4-3
30	10mA/1KHz	3.0	3.0

NOTE: Specifications subject to change without notice. Please check our website for latest information.