


1. Part No. Expression:

PIA 0605S 1R0MN

(a) (b) (c) (d) (e)

- a) Series Code
- b) Dimension Code
- c) Type Code
- d) Inductance Code
- e) Tolerance Code

2. Configuration & Dimensions:

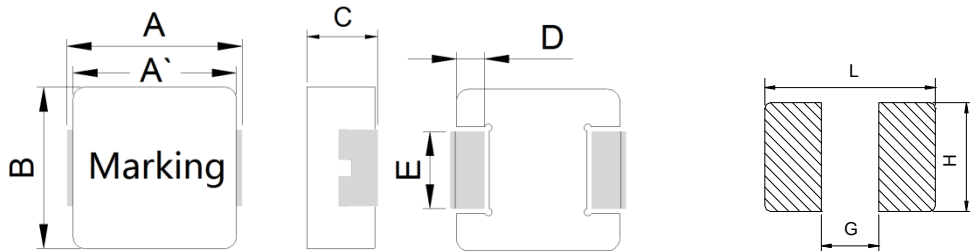

Note:


1. The above PCB layout is for reference only.
2. Solder paste thickness of 0.15mm and above is recommended.
3. Marking: Top row – Inductance code, Bottom row – YYWW.

Recommended PC Board Pattern

Unit: mm


A	A'	B	C	D	E	L	G	H
7.3±0.3	6.7±0.2	6.6±0.3	4.8±0.2	1.6±0.3	3.0±0.2	8.0 Ref.	3.5 Ref.	3.4 Ref.

3. Schematic:



NOTE: Specifications subject to change without notice. Please check our website for latest information.

4. Material List:



- a) Core
- b) Wire
- c) Terminal
- d) Ink

5. General Specification:

- (a) Operating Temp. : -40°C to $+125^{\circ}\text{C}$ (Including self - temperature rise).
- (b) Storage Temp. : -40°C to $+125^{\circ}\text{C}$ (on board).
- (c) Humidity Range. : $85 \pm 2\%$ RH.
- (d) Heat Rated Current (Irms) will cause the coil temperature rise approximately Δt of 40°C .
- (e) Saturation Current (Isat Typ.) will cause L0 to drop approximately 30%.
- (f) Part Temp. (Ambient+Temp. Rise) should not exceed 125°C under worst case operating conditions.
- (g) Storage condition (component in its packaging)
 - i) Temperature: Less than 40°C
 - ii) Humidity : 60% RH

NOTE: Specifications subject to change without notice. Please check our website for latest information.


6. Electrical Characteristics:

Part Number	Inductance Lo (uH) ±20% @ 0A	Test Frequency (Hz)	I _{rms} (A)		I _{sat} (A)		DCR (mΩ)Typ.	DCR (mΩ)Max.
			Typ.	Max.	Typ.	Max.		
PIA0605SR15MN	0.15	1.0V/100K	35.0	32.0	45.0	40.0	1.3	1.7
PIA0605SR47MN	0.47	1.0V/100K	22.0	20.0	22.0	20.0	2.9	3.3
PIA0605SR56MN	0.56	1.0V/100K	21.0	19.0	21.0	18.0	3.4	3.9
PIA0605SR68MN	0.68	1.0V/100K	20.0	18.0	20.0	17.0	3.6	4.1
PIA0605SR82MN	0.82	1.0V/100K	18.0	16.0	18.0	15.0	5.3	5.9
PIA0605S1R0MN	1.00	1.0V/100K	17.0	15.0	16.0	13.0	5.6	6.2
PIA0605S1R2MN	1.20	1.0V/100K	16.0	14.0	14.0	11.0	6.4	7.1
PIA0605S1R5MN	1.50	1.0V/100K	15.0	13.0	13.0	10.5	6.6	7.3
PIA0605S1R8MN	1.80	1.0V/100K	14.5	12.5	11.0	9.0	7.6	9.0
PIA0605S2R2MN	2.20	1.0V/100K	14.0	12.0	10.0	8.5	10.0	11.5
PIA0605S3R3MN	3.30	1.0V/100K	13.0	11.0	9.5	8.0	14.0	16.2
PIA0605S4R7MN	4.70	1.0V/100K	11.0	9.5	8.8	7.5	20.8	24.0
PIA0605S5R6MN	5.60	1.0V/100K	10.0	8.5	8.0	7.2	28.0	33.0
PIA0605S6R8MN	6.80	1.0V/100K	9.0	8.0	7.6	7.0	30.0	36.0
PIA0605S8R2MN	8.20	1.0V/100K	7.5	6.5	6.5	6.0	38.5	45.0
PIA0605S100MN	10.0	1.0V/100K	7.0	6.0	6.0	5.7	44.0	53.0
PIA0605S120MN	12.0	1.0V/100K	5.8	4.8	5.1	4.7	56.0	68.0
PIA0605S150MN	15.0	1.0V/100K	5.0	4.0	4.0	3.2	73.0	85.0
PIA0605S220MN	22.0	1.0V/100K	4.2	3.6	3.6	3.1	122	142
PIA0605S330MN	33.0	1.0V/100K	3.0	2.5	2.3	1.8	142	170
PIA0605S470MN	47.0	1.0V/100K	2.6	2.0	1.8	1.5	275	320

NOTE: Specifications subject to change without notice. Please check our website for latest information.




7. Characteristics Curves:

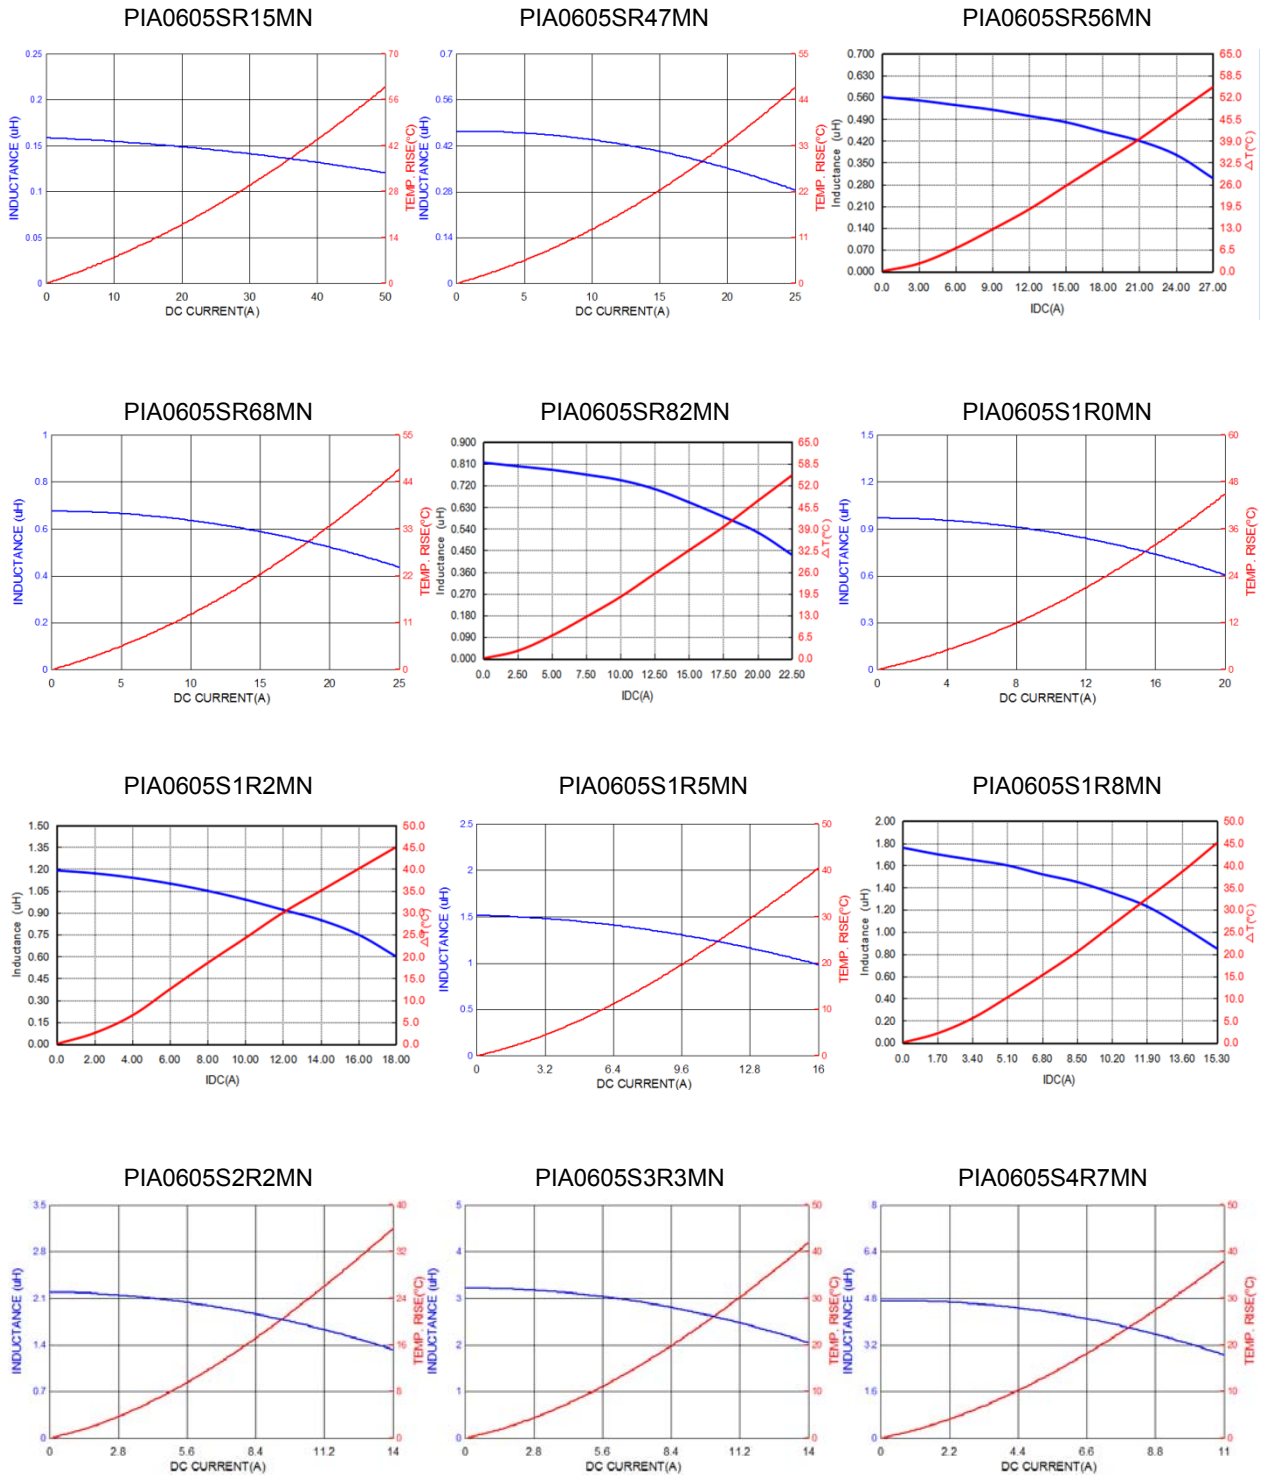

NOTE: Specifications subject to change without notice. Please check our website for latest information.



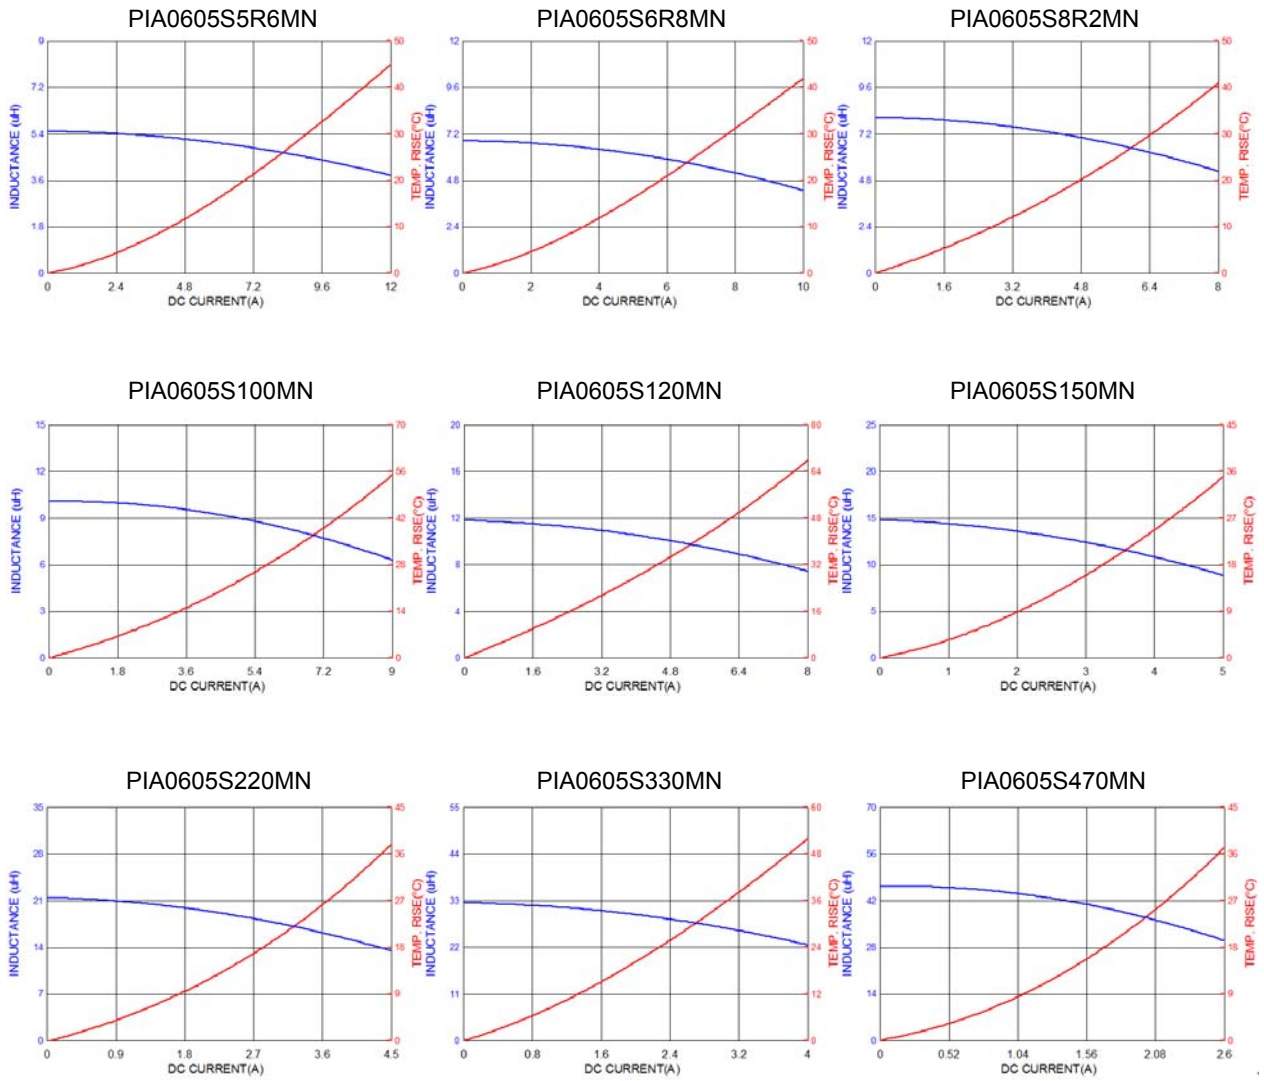

NOTE: Specifications subject to change without notice. Please check our website for latest information.

8. Soldering:

Mildly activated rosin fluxes are preferred. The minimum amount of solder can lead to damage from the stresses caused by the difference in coefficients of expansion between solder, chip and substrate. Our terminations are suitable for all re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air.

8-1 Solder Re-flow:


Recommended temperature profiles for re-flow soldering in Figure 1.

8-2 Soldering Iron (Figure 2):

Products attachment with soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended.


Note :

- a) Preheat circuit and products to 150°C.
- b) 355°C tip temperature (Max.)
- c) Never contact the ceramic with the iron tip
- d) 1.0mm tip diameter (Max.)
- e) Use a 20 watt soldering iron with tip diameter of 1.0mm
- f) Limit soldering time to 4~5 secs.

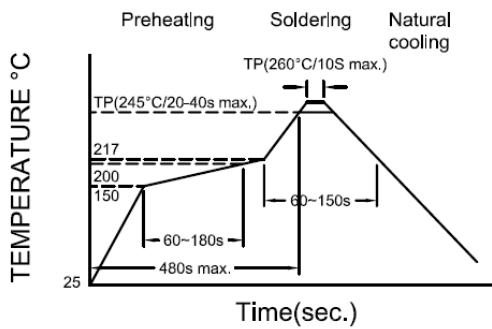

Reflow times: 3 times max

Fig.1

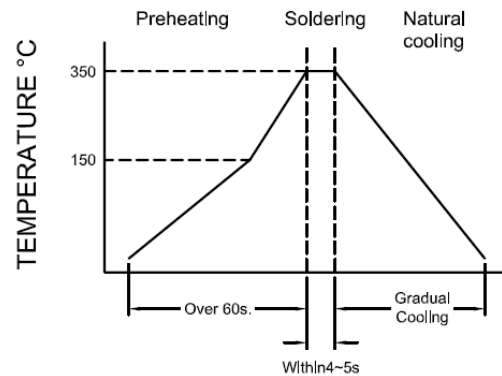


Iron Soldering times: 1 times max

Fig.2

NOTE: Specifications subject to change without notice. Please check our website for latest information.


9. Packaging Information:

9-1 Reel Dimension

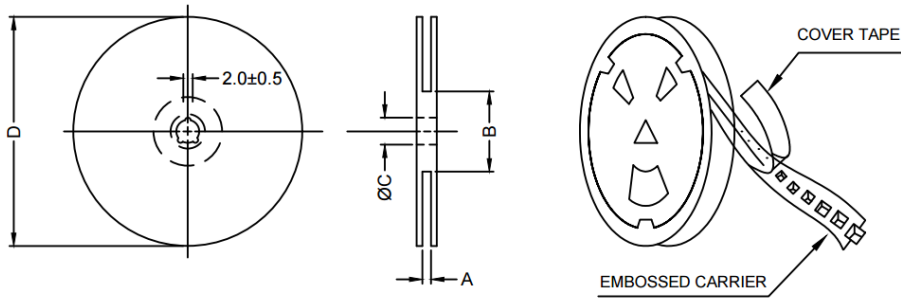

Type	A(mm)	B(mm)	C(mm)	D(mm)
13"x16mm	16.4+2/-0	100±2	13+0.5/-0.2	330

9-2 Tape Dimension

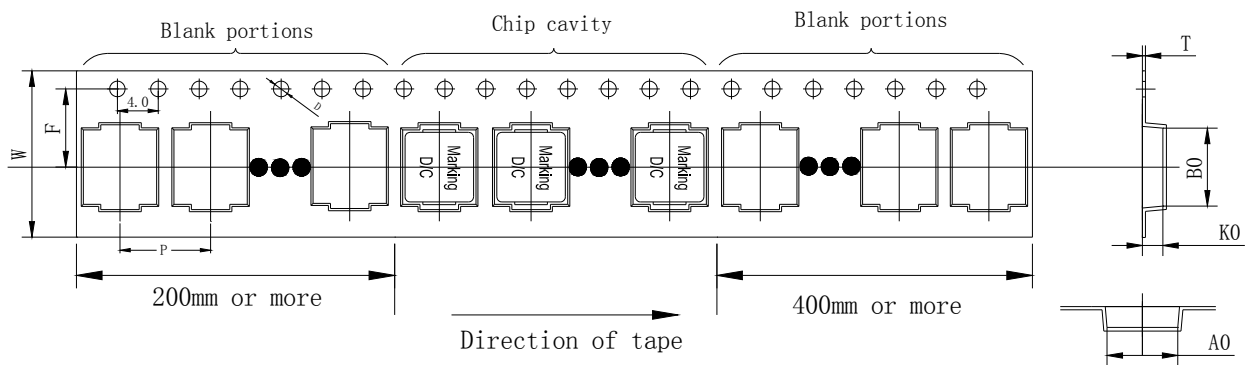


Series	Size	Bo(mm)	Ao(mm)	Ko(mm)	P(mm)	W(mm)	F(mm)	T(mm)	D(mm)
PIA	0605	7.7±0.1	7.0±0.1	5.3±0.1	12.0±0.1	16±0.3	7.5±0.1	0.35±0.05	1.5±0.1

9-3 Packaging Quantity

PIA	0605
Chip / Reel	800
Inner box	1600
Carton	6400

NOTE: Specifications subject to change without notice. Please check our website for latest information.

9-4 Tearing Off Force

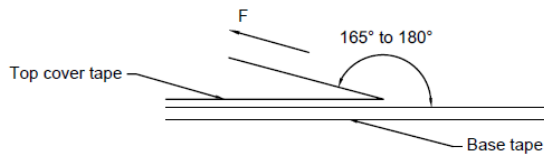

The force for tearing off cover tape is 10 to 130 grams in the arrow direction under the following conditions.

Room Temp. (°C)	Room Humidity (%)	Room atm (hPa)	Tearing Speed mm/min
5~35	45~85	860~1060	300

Application Notice:

1. Storage Conditions:

To maintain the solderability of terminal electrodes:

- a) Recommended products should be used within 12 months from the time of delivery.
- b) The packaging material should be kept where no chlorine or sulfur exists in the air.

2. Transportation:

- a) Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- b) Vacuum pick up is strongly recommended for individual components.
- c) Bulk handling should ensure that abrasion and mechanical shock are minimized.

NOTE: Specifications subject to change without notice. Please check our website for latest information.